

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 937 902 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.08.1999 Bulletin 1999/34

(51) Int Cl.⁶: **F16D 3/74**

(21) Application number: **99301184.0**

(22) Date of filing: **17.02.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **20.02.1998 GB 9803627**

(71) Applicant: **Marconi Marine (VSEL) Limited,**
(formerly Vickers Shipbuilding & Engineering
Limited)
Cumbria LA14 1AF (GB)

(72) Inventors:
• **Murrell, Peter William**
Barrow In Furness, Cumbria, LA14 4JS (GB)
• **Posnett, Alan Jeffrey**
Ulverston, Cumbria, LA12 9NP (GB)
• **Whitehouse, Anthony**
Barrow In Furness, Cumbria, LA13 9LQ (GB)

(74) Representative: **Hoste, Colin Francis**
The General Electric Company p.l.c.
GEC Patent Department
Waterhouse Lane
Chelmsford, Essex CM1 2QX (GB)

(54) Flexible coupling

(57) A flexible coupling (12, 16) for transmitting torque from a drive shaft (10) to a driven shaft (18) is described. The coupling (12, 16) comprises a rotatable drive member (20) securable to the drive shaft (10); a rotatable driven member (22) securable to the driven shaft (18); a plurality of radial vanes (24) are provided on the drive member (20) which interdigitate with a plurality of radial vanes (26) on the driven member (22) and

resiliently deformable elements (30, 32) are interposed between the interdigitating vanes (24, 26) to transmit torque there between. The resiliently deformable elements (30, 32) are detachably secured to only either the vanes (24) on the drive member or the vanes (26) on the driven member and are removeable in a radial direction without having to remove the drive or driven vanes from the coupling.

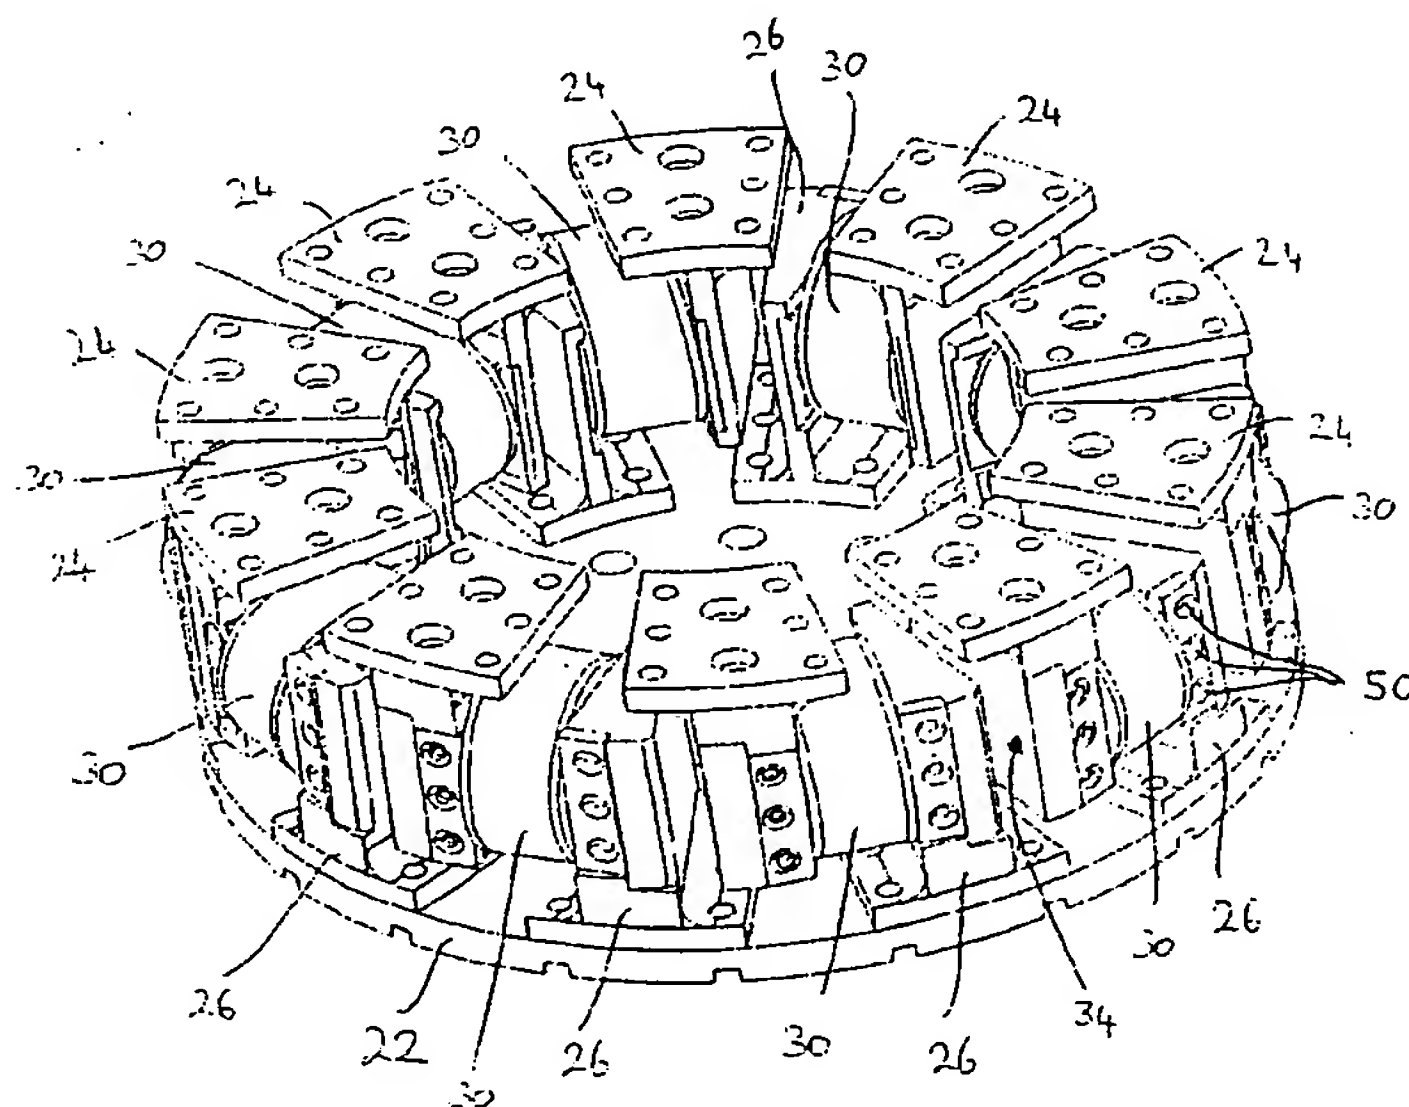


Figure 2

EP 0 937 902 A2

Description

[0001] This invention relates to a flexible coupling for transmitting torque from a drive shaft to a driven shaft and which attenuates the transmission of noise and/or vibration by or through a drive member and a driven member.

[0002] Flexible couplings are used where there is likely to be misalignment between coaxially aligned members of a power train, for example, between the engine and the propeller shaft of a ship. One form of known flexible coupling comprises a drive member and driven member which include inter-engaging means in the form of interdigitating radial vanes which are circumferentially spaced to which flexible load transmitting elements are attached and interposed between corresponding vanes. The flexible load transmitting elements, which typically comprise pads made from a number of layers of resilient deformable material interposed by rigid spacer plates, transmit torque from the vanes of the drive member to the driven member. The pads, being resiliently deformable, minimise any noise and/or vibration transmission by or through the coupling. Whilst the known coupling arrangements are found to work effectively the inventors have appreciated that they have certain limitations.

[0003] For example, in the case of ships it is often the case that the power required in the reverse (astern) direction of rotation is less than that required when operating in the forward (ahead) direction of rotation. For such applications a flexible coupling which was designed for equal power transmission in both directions of rotation would be over-engineered when the coupling operates in the astern sense and results in a coupling which is heavier than it need be. To overcome this problem it has been proposed to design couplings on an asymmetric basis, that is the coupling has different properties depending on the direction of rotation. For example, in one arrangement a larger number of pads is provided for operation in the principal direction (ahead) of rotation and fewer in the reverse direction (astern). To ensure that the coupling is as small as possible the resultant gaps between the interdigitating vanes where pads have been removed are reduced by altering the circumferential spacing of the vanes.

[0004] In an asymmetric coupling arrangement the way in which the pads are attached to the vanes depends on the direction of rotation. For example various techniques are known such as bonding or fitting the pads and spacer plates into slotted openings on the vanes. Typically the slots are dovetailed and the sets of pads slid into place on the vanes. The dovetail joint arrangement is expensive and time consuming to machine to close tolerances and requires considerable hand labour to obtain a proper fit. The inventors have appreciated that a particular disadvantage of this arrangement is that different vanes are required on the drive and driven members and these are particularly costly to manufacture. To improve the uniformity of com-

pressional loading over the pad surface the pads are wedge shaped (radially tapered) with a taper angle of between 8° and 11° , and are of greatest thickness at the circumference and least towards the axis of rotation. Such an arrangement ensures that the force per unit thickness of pad is substantially constant over the pad's surface area. A disadvantage of this arrangement is that when a new coupling is required which can transmit a different amount of torque, a new set of pads has to be designed. In particular, the angle of taper of the pads is altered in dependence on the diameter of the drive or driven members to maintain a constant circular pitch which ensures a constant pad pressure. Since the pads have to undergo rigorous testing which can take many weeks (typically the pads are tested for 10 million cycles at a rate of rotation of a few hundred revolutions per minute), this significantly increases the cost of designing new couplings.

[0005] The present invention arose in an endeavour to provide a flexible coupling which at least in part overcomes the limitations of the known arrangements.

[0006] According to the present invention there is provided a flexible coupling for transmitting torque from a drive shaft to a driven shaft, the coupling comprising: a rotatable drive member securable to the drive shaft; a rotatable driven member securable to the driven shaft; a plurality of radial vanes on the drive member which interdigitate with a plurality of radial vanes on the driven member and resiliently deformable elements interposed between the interdigitating vanes to transmit torque there between and characterised in that the resiliently deformable elements are detachably secured to only either the vanes on the drive member or the vanes on the driven member and are removeable in a radial direction without having to remove the drive or driven vanes from the coupling.

[0007] Advantageously in its rest state none of the resiliently deformable elements are in a state of compression thereby enabling individual elements to be readily replaced whilst the coupling remains in situ. In contrast in the known couplings the resiliently deformable elements (30, 32) are secured to both the drive and driven vanes and are in a state of pre-compression to eliminate the element being in a state of tension when the coupling operates in a reverse direction of rotation. Since the elements are precompressed this makes it difficult, if not impossible, to replace or service the elements without having to remove one or more vanes and in many cases without having to dismantle the entire coupling which requires de-installation of the coupling.

[0008] In a much preferred arrangement the resiliently deformable elements for one direction of rotation, most preferably the principal direction of rotation of the coupling, are restrained from moving in a radial and axial direction but are free to move in a circumferential direction in relation to the corresponding vane to which it is not secured.

[0009] In a particularly preferred embodiment of the

invention each vane has a substantially flat surface and an opposite surface having a channel formed therein, the vanes being arranged on the drive and driven members such that the channel in a vane on the drive member is used to detachably secure one face of the resiliently deformable element and the opposite face of the resiliently deformable element engages in the channel on the adjacent vane on the driven member to restrain its movement in the axial and radial directions.

[0010] Advantageously the radial vanes are detachably secured to the drive and driven members and are removeable in a radial direction without having to dismantle the coupling thereby further facilitating servicing and maintenance of the coupling.

[0011] Preferably the vanes on the drive and driven members are interchangeable and therefore the same vane can be used on both members of the coupling which significantly reduces the cost of the coupling.

[0012] Most conveniently the vanes are radially tapered and the resiliently deformable elements have substantially parallel faces. A particular advantage of using elements which have substantially parallel faces is that new couplings can be readily designed which utilise the same elements and thereby eliminate the need for expensive testing. Furthermore, having parallel faces enables the elements to be easily removed and replaced.

[0013] Advantageously the surface of the resiliently deformable elements in a circumferential plane of the respective rotatable member has a rounded perimeter. Due to the rounded shape of the resiliently deformable elements they are better able to more uniformly withstand any shear component of force in the plane of the elements as a result of coaxial misalignment of the drive and driven members. In contrast the known couplings use square or rectangular deformable elements and are consequently better able to withstand shear forces which act in a direction between the corners of the element than those which act between the edges.

[0014] Preferably the shape of the resiliently deformable elements has a continuously curved shape and is advantageously substantially circular or substantially elliptical in shape. It will be appreciated that elements which are substantially circular have uniform characteristics for all directions of shear.

[0015] Alternatively the shape of the resiliently deformable elements is polygonal and the junction between adjacent sides is curved, such as a square with rounded corners.

[0016] Preferably the resiliently deformable elements are cylindrical. Although there will be a slight overloading of the element on the outermost edge such an arrangement enables the same elements to be used even when the size of coupling changes which eliminates the need for expensive testing of the elements.

[0017] The resiliently deformable elements advantageously comprise a first set of elements which are compressed in a first direction of rotation and a second set of elements which are compressed in a second direction

of rotation and wherein the vanes are equally spaced circumferentially on the drive and the driven members and there are unequal numbers of first and second resiliently deformable elements. This is particularly advantageous since a replacement set of elements can be fitted prior to removing the worn ones. Furthermore, the coupling can be readily adapted by adding or removing elements. This feature is considered inventive in its own right.

[0018] The resiliently deformable elements preferably comprise a plurality of resiliently deformable pads having rigid spacer plates interposed there between.

[0019] According to a second aspect of the invention a flexible coupling for transmitting torque from a drive shaft to a driven shaft, the coupling comprising: a rotatable drive member securable to the drive shaft; a rotatable driven member securable to the driven shaft; a plurality of radial vanes on the drive member which interdigitate with a plurality of radial vanes on the driven member and first and second resiliently deformable elements interposed between the interdigitating vanes to transmit torque there between wherein the first deformable elements are compressed in a first direction of rotation and the second deformable elements are compressed in a second direction of rotation characterised in that the vanes are equally spaced circumferentially on the drive and the driven members and there are unequal numbers of first and second resiliently deformable elements.

[0020] For a better understanding of the invention a flexible coupling in accordance with the invention will now be described by way of example only with reference to the accompanying drawings in which:

Figure 1 is a part of a drive train incorporating two flexible couplings in accordance with the invention;

Figure 2 is an isometric view of a flexible coupling in accordance with the invention with the drive member and the astern pads removed for clarity;

Figure 3 is a portion of the flexible coupling of Figure 2 as viewed in a radial direction showing the drive and driven members with inter-engaging vanes with sets of ahead and astern pads interposed in between;

Figure 4 is a cross-section through the coupling of Figure 3 in the direction 3-3 of Figure 3;

Figure 5 is an exploded isometric view of one of the vanes on the drive member showing the method of attachment of the ahead pad;

Figure 6 is an isometric view of the vane of Figure 5 with the ahead pad secured to it;

Figure 7 is a plan view of the vane of Figure 6 in the

direction B;

Figure 8 is an exploded isometric view of one of the vanes on the drive member showing the method of attachment of the astern pad;

Figure 9 is an isometric view of the vane of Figure 8 with the astern pad secured to it; and

Figure 10 is a plan view of the vane of Figure 9 in the direction C.

[0021] Referring to Figure 1, there is shown a part of a power train which comprises a drive shaft 10 which is connected by a first flexible coupling 12 to an intermediate shaft 14 (often termed a Cardan shaft) which, in turn, is connected to a second flexible coupling 16 and finally to a driven shaft 18 which could, for example, be the propeller shaft of a ship. The present invention concerns the construction of the flexible couplings 12 or 16 which are both identical. Accordingly the construction of only the first coupling 12 will be described, though it will be appreciated that this applies equally to the second.

[0022] The flexible coupling comprises a rotatable drive member 20, in the form of a circular plate, which is connected to the drive shaft 10, and a rotatable driven member 22, also in the form of a circular plate, which is connected to the driven shaft 18. The drive member 20 and driven member 22 are coaxially aligned in a conventional manner and each includes ten forged steel vanes 24 and 26, respectively, which interdigitate with each other as is best illustrated in Figure 2. For clarity the drive member 20 and driven shaft 18 are removed in the Figure. Each of the vanes 24 and 26 is identical and is formed as a T-section with lateral flanges 24a, 24b, 26a and 26b respectively to enable its attachment to the drive member 20 and driven member 22. Each vane 24 is securely fastened to the drive member 20 using two locating dowels and six bolts 28, as will be apparent from Figures 5 and 8. Each of the vanes 26 is securely fastened to the driven member 22 in a like manner. Whilst the attachment of the vanes in this way is preferred, it will be appreciated that the vanes can be attached by other methods, such as welding or brazing, or integrally formed as part of the drive member 20 or driven member 22.

[0023] Referring to Figure 4, it will be seen that each of the vanes 24 and 26 is radially tapered such that adjacent faces of inter-engaging vanes define a volume having parallel faces. Securely fastened to a first side of the vanes 24 are forward-driving, resiliently deformable, load-transmitting elements 30. Securely fastened to the opposite side of the vane 24 are rearward-driving, resiliently deformable, load-transmitting elements 32. Each of the load-transmitting elements 30, 32 is made from moulded rubber with a number of integral rigid steel interleaves. The forward-driving elements 30 (hereinafter referred to as "ahead pads", since they are operable

under a compressive load in a forward, or ahead, direction of rotation) have ten rubber leaves and nine steel interleaves. The rearward-driving, load-transmitting elements 32 (hereinafter referred to as "astern pads", as they are operable under a compressive load in a rearward, or astern, direction of rotation) have two rubber leaves and one steel interleaf. The curved rubber surface of the pads 30, 32 is coated with neoprene to protect the rubber from oil spray during operation of the coupling.

[0024] In use, the ahead pads 30 bear on a first side of a corresponding vane 26 on the driven member so that torque is transmitted between the drive member 20 and the driven member 26 in an ahead (forward) direction of rotation. Alternatively, torque is transmitted between the drive member 20 and driven member 22 in an astern (reverse) direction of rotation by the astern pads 32 bearing on the opposite side of the vane 26 on the driven member 22.

[0025] Both the ahead pads 30 and astern pads 32 are substantially right circular cylinders in shape and are orientated so that torsional loads result in elastomeric compression of the pad. Any misalignment between the drive member 20 and driven member 22, both axial and radial, results in elastomeric shear of the pad. Since the pads have circular faces, as viewed in the axial plane, the pads can uniformly cope with elastomeric pad shear. In contrast, the known coupling arrangements which use square or rectangular pads are better able to withstand shear when it runs in a direction between the corners of the pad rather than between the sides. It will be appreciated by those skilled in the art that other shapes of pad can also be used, such as elliptical or other rounded shapes.

[0026] Referring to Figures 5, 6 and 7, there is shown the method by which the ahead pads 30 are secured to the vanes 24. It will be appreciated that each vane has a first face 34 which is substantially flat (see Figure 8) and an opposite face 36 which has a radially extending channel formed therein (see Figure 5). As described above, the vanes 24 and 26 are identical.

[0027] Referring to Figure 5, each of the ahead pads 30 has circular metal end plates 38, 40 attached to its outer surfaces when the pad is moulded. The end plate 38 has machined on its outer surface a T-slotted plate 42 as will be apparent from View A of Figure 5. To aid understanding the slotted plate 42 is illustrated as a separate component to the end plate 38 in the exploded view of Figure 5. In practice, however, the T-slotted portion is machined as an integral part of the end plate 38. The T-slotted end plate 42 is configured to fit snugly into the channel 36. To secure the ahead pad to the vane 24, a keep block 44 is firstly inserted into the channel 36 and secured by means of three bolts 46. The keep block 44 has a rebated edge which corresponds and co-operates with the T-slotted end plate 42. The T-slotted plate 42 with the pad attached is slid into the channel 36 such that it engages with the key formed by the keep

block 44. A keep plate 48 is then secured to the end of the vane 40 and includes a radially extending shoulder which engages with and co-operates with the opposite slot on the T-slotted plate 42 to securely hold the plate 42 into tight engagement in the channel 36. The keep plate 48 is then secured to the vane by means of three bolts 50. The ahead pad 30 is thus rigidly and detachably secured to the face 34 of the vane 24.

[0028] The end plate 40 on the opposite face of the pad 30 has a plain square spigot 52 extending from its surface. As with the T-slotted plate 42 the spigot 52 is machined as an integral part of the end plate 40. The spigot 52 is dimensioned such that it can readily engage in the channel 36 of the adjacent vane as is best illustrated in Figure 3. When the coupling is running in an ahead direction of rotation, the spigot 52 engages in the channel 36 of the adjacent vane 26. To prevent the spigot moving in a radial direction, a keep block and keep plate similar to those described above are bolted to the vane 26. It will be appreciated that the spigot 52 is not secured to the vane 26 and is free to slide in and out of the slot 36 in a circumferential direction. It is however restrained from moving in a radial and axial direction, which allows the transmission of only compressive loads through the ahead pads 30. Tensile loads are thus prevented in the ahead pads 30. A layer of "Tufnol" (a wear resistant fibre reinforced phenolic resin) is secured to the surfaces of the plate 42 and the spigot 52 to prevent metal-to-metal contact with the corresponding surfaces of the vanes ("Tufnol" is a registered Trademark of Tufnol Ltd). It will be appreciated that since the ahead pad assembly 30 has parallel faces, the pads 30 can be readily inserted and/or replaced by removal of the keep plates 48. Furthermore, since the ahead pads 30 are secured only to the vane 24 and not to the vane 26, when the coupling operates in a reverse (astern) direction of rotation the pads 30 will not be under tension. As a result the pads 30 do not need to be in a state of pre-compression when the coupling is in its rest state thereby enabling individual pads 30 to be replaced without requiring the removal of the vanes. It is thus possible to replace the pads whilst the coupling remains in situ.

[0029] Referring to Figures 8, 9 and 10, the method by which the astern pad 32 is attached to the vane 24 is illustrated. The astern pad 32 is secured to the flat face 34. The pad 32 has a plain circular end plate 54 on one surface and a square end plate 56 on the opposite surface. The circular end plate 54 has a Tufnol coating on its surface and, during reverse rotation of the coupling, this surface engages with the corresponding flat surface 34 of the adjacent vane 26 on the driven member 22. The circular end plate 54 is not secured to the surface of the vane 26. The square end plate 56 is shaped to incorporate a keep plate which enables the pad 32 to be affixed to the vane 24 by means of two bolts 58. To ensure the end plate is securely fastened to the flat surface 34 a keep block 60 is fastened over the end plate 56 using two bolts 62. The plain end plate 54 pro-

vides a plain contact surface with the mating surface 34 of the adjacent vane 26, which therefore allows some pad slippage (movement in a radial and axial direction) during operation, although the astern pad primarily transmits compressive loads. To prevent any wear as a result of astern pad slippage, a sheet of fibreglass is bonded to the face 34 of the corresponding vane 26. Although astern pad slippage will reduce the amount of torque the coupling can transmit in the astern direction, this is not a problem since operation in this direction is far more infrequent and is usually at much lower torques. As with the ahead pads 30, the astern pads 32 are secured only to the vane 24 and so are not under tension when the coupling operates in a forward (ahead) direction of rotation. As a result no pre-compression of the pads 32 is necessary when the coupling is in its rest state which enables individual pads to be replaced without requiring removal of the vanes.

[0030] It will be appreciated that since the vanes 24 on the drive member and the vanes 26 on the driven member are identical, this substantially reduces the cost of manufacturing the coupling. It will be further appreciated that by providing a channel on one face of the vane and having a flat surface on the other, a simple and effective way of securing the ahead and astern pads is provided. As it is often required to transmit much lower torques in one direction of rotation (usually the astern), often an order of magnitude lower, it is preferable to have only five astern pads as compared to ten ahead pads. Since the vanes 24 and 26 on the drive and driven members 20 and 22, respectively, are circumferentially equally spaced, gaps result. This arrangement is found to be particularly advantageous since a new set of astern pads can be fitted prior to the removal of the worn ones. Furthermore, the operating characteristics of the coupling can be readily altered by simply changing the number of pads.

[0031] It will be appreciated by those skilled in the art that variations may be made to the embodiment described which are within the scope of the invention. For example the T-slotted plate 42, keep block 44 and keep plate 48 are shown as having right angled shoulders which cooperate with each other to secure the ahead pad 30 to the vane 24. In a preferred arrangement these cooperating shoulders are dovetailed which eliminates the need for such close tolerances in the machinery or fitting of these components. Accordingly, the invention should not be limited to the specific embodiment illustrated in the accompanying drawings.

Claims

1. A flexible coupling (12) for transmitting torque from a drive shaft (10) to a driven shaft (18), the coupling comprising: a rotatable drive member (20) securable to the drive shaft (10); a rotatable driven member (22) securable to the driven shaft (18); a plurality

of radial vanes (24) on the drive member (20) which interdigitate with a plurality of radial vanes (26) on the driven member (22) and resiliently deformable elements (30, 32) interposed between the interdigitating vanes (24, 26) to transmit torque there between; characterised in that the resiliently deformable elements (30, 32) are detachably secured to only either the vanes (24) on the drive member (20) or the vanes (26) on the driven member (22) and are removeable in a radial direction without having to remove the drive or driven vanes (24, 26) from the coupling.

2. A flexible coupling according to Claim 1 and further characterised in that in its rest state none of the resiliently deformable elements (30, 32) are in a state of compression.
3. A flexible coupling according to Claim 1 or Claim 2 and further characterised in that the resiliently deformable elements (30) for one direction of rotation are restrained from moving in a radial and axial direction but are free to move in a circumferential direction in relation to the corresponding vane (26) to which it is not secured.
4. A flexible coupling according to Claim 3 and further characterised in that each vane (24, 26) has a substantially flat surface (34) and an opposite surface having a channel (36) formed therein, the vanes (24, 26) being arranged on the drive (18) and driven (22) members such that the channel (36) in a vane on the drive member (20) is used to detachably secure one face of the resiliently deformable element (30, 32) and the opposite face of the resiliently deformable element engages in the channel (36) on the adjacent vane on the driven member (22) to restrain its movement in the axial and radial directions.
5. A flexible coupling according to any preceding claim and further characterised in that the radial vanes (24, 26) are detachably secured (28) to the drive (20) and driven (22) members and are removeable in a radial direction without having to dismantle the coupling.
6. A flexible coupling according to any preceding claim and further characterised in that the vanes (24, 26) on the drive (20) and driven (22) members are interchangeable.
7. A flexible coupling according to any preceding claim and further characterised in that the vanes (24, 26) are radially tapered and the resiliently deformable elements (30, 32) have substantially parallel faces.
8. A flexible coupling according to any preceding claim

and further characterised in that the surface of the resiliently deformable elements (30, 32) in a circumferential plane of the respective rotatable member has a rounded perimeter.

9. A flexible coupling according to Claim 8 and further characterised in that the shape of the resiliently deformable elements (30, 32) has a continuously curved shape.
10. A flexible coupling according to Claim 8 or Claim 9 and further characterised in that the resiliently deformable elements (30, 32) are substantially circular in shape.
11. A flexible coupling according to Claim 8 or Claim 9 and further characterised in that the resiliently deformable elements (30, 32) are substantially elliptical in shape.
12. A flexible coupling according to Claim 8 and further characterised in that the shape of the resiliently deformable elements (30, 32) is polygonal and the junction between adjacent sides is curved.
13. A flexible coupling according to any one of Claims 8 to 12 and further characterised in that the resiliently deformable elements (30, 32) are cylindrical.
14. A flexible coupling according to any preceding claim and further characterised in that the resiliently deformable elements (30, 32) comprise a first set of elements (30) which are compressed in a first direction of rotation and a second set of elements (32) which are compressed in a second direction of rotation and wherein the vanes (24, 26) are equally spaced circumferentially on the drive (20) and the driven (22) members and there are unequal numbers of first (30) and second (32) resiliently deformable elements.
15. A flexible coupling according to any preceding claim and further characterised in that the resiliently deformable elements (30, 32) comprise a plurality of resiliently deformable pads having rigid spacer plates interposed there between.
16. A flexible coupling (12) for transmitting torque from a drive shaft (10) to a driven shaft (18), the coupling comprising: a rotatable drive member (20) securable to the drive shaft (10); a rotatable driven member (22) securable to the driven shaft (18); a plurality of radial vanes (24) on the drive member (20) which interdigitate with a plurality of radial vanes (26) on the driven member (22) and first (30) and second (32) resiliently deformable elements interposed between the interdigitating vanes (24, 26) to transmit torque there between wherein the first deformable

elements (30) are compressed in a first direction of rotation and the second deformable elements (32) are compressed in a second direction of rotation; characterised in that the vanes (24, 26) are equally spaced circumferentially on the drive (20) and the driven members (22) and there are unequal numbers of first (30) and second (32) resiliently deformable elements.

5

10

15

20

25

30

35

40

45

50

55

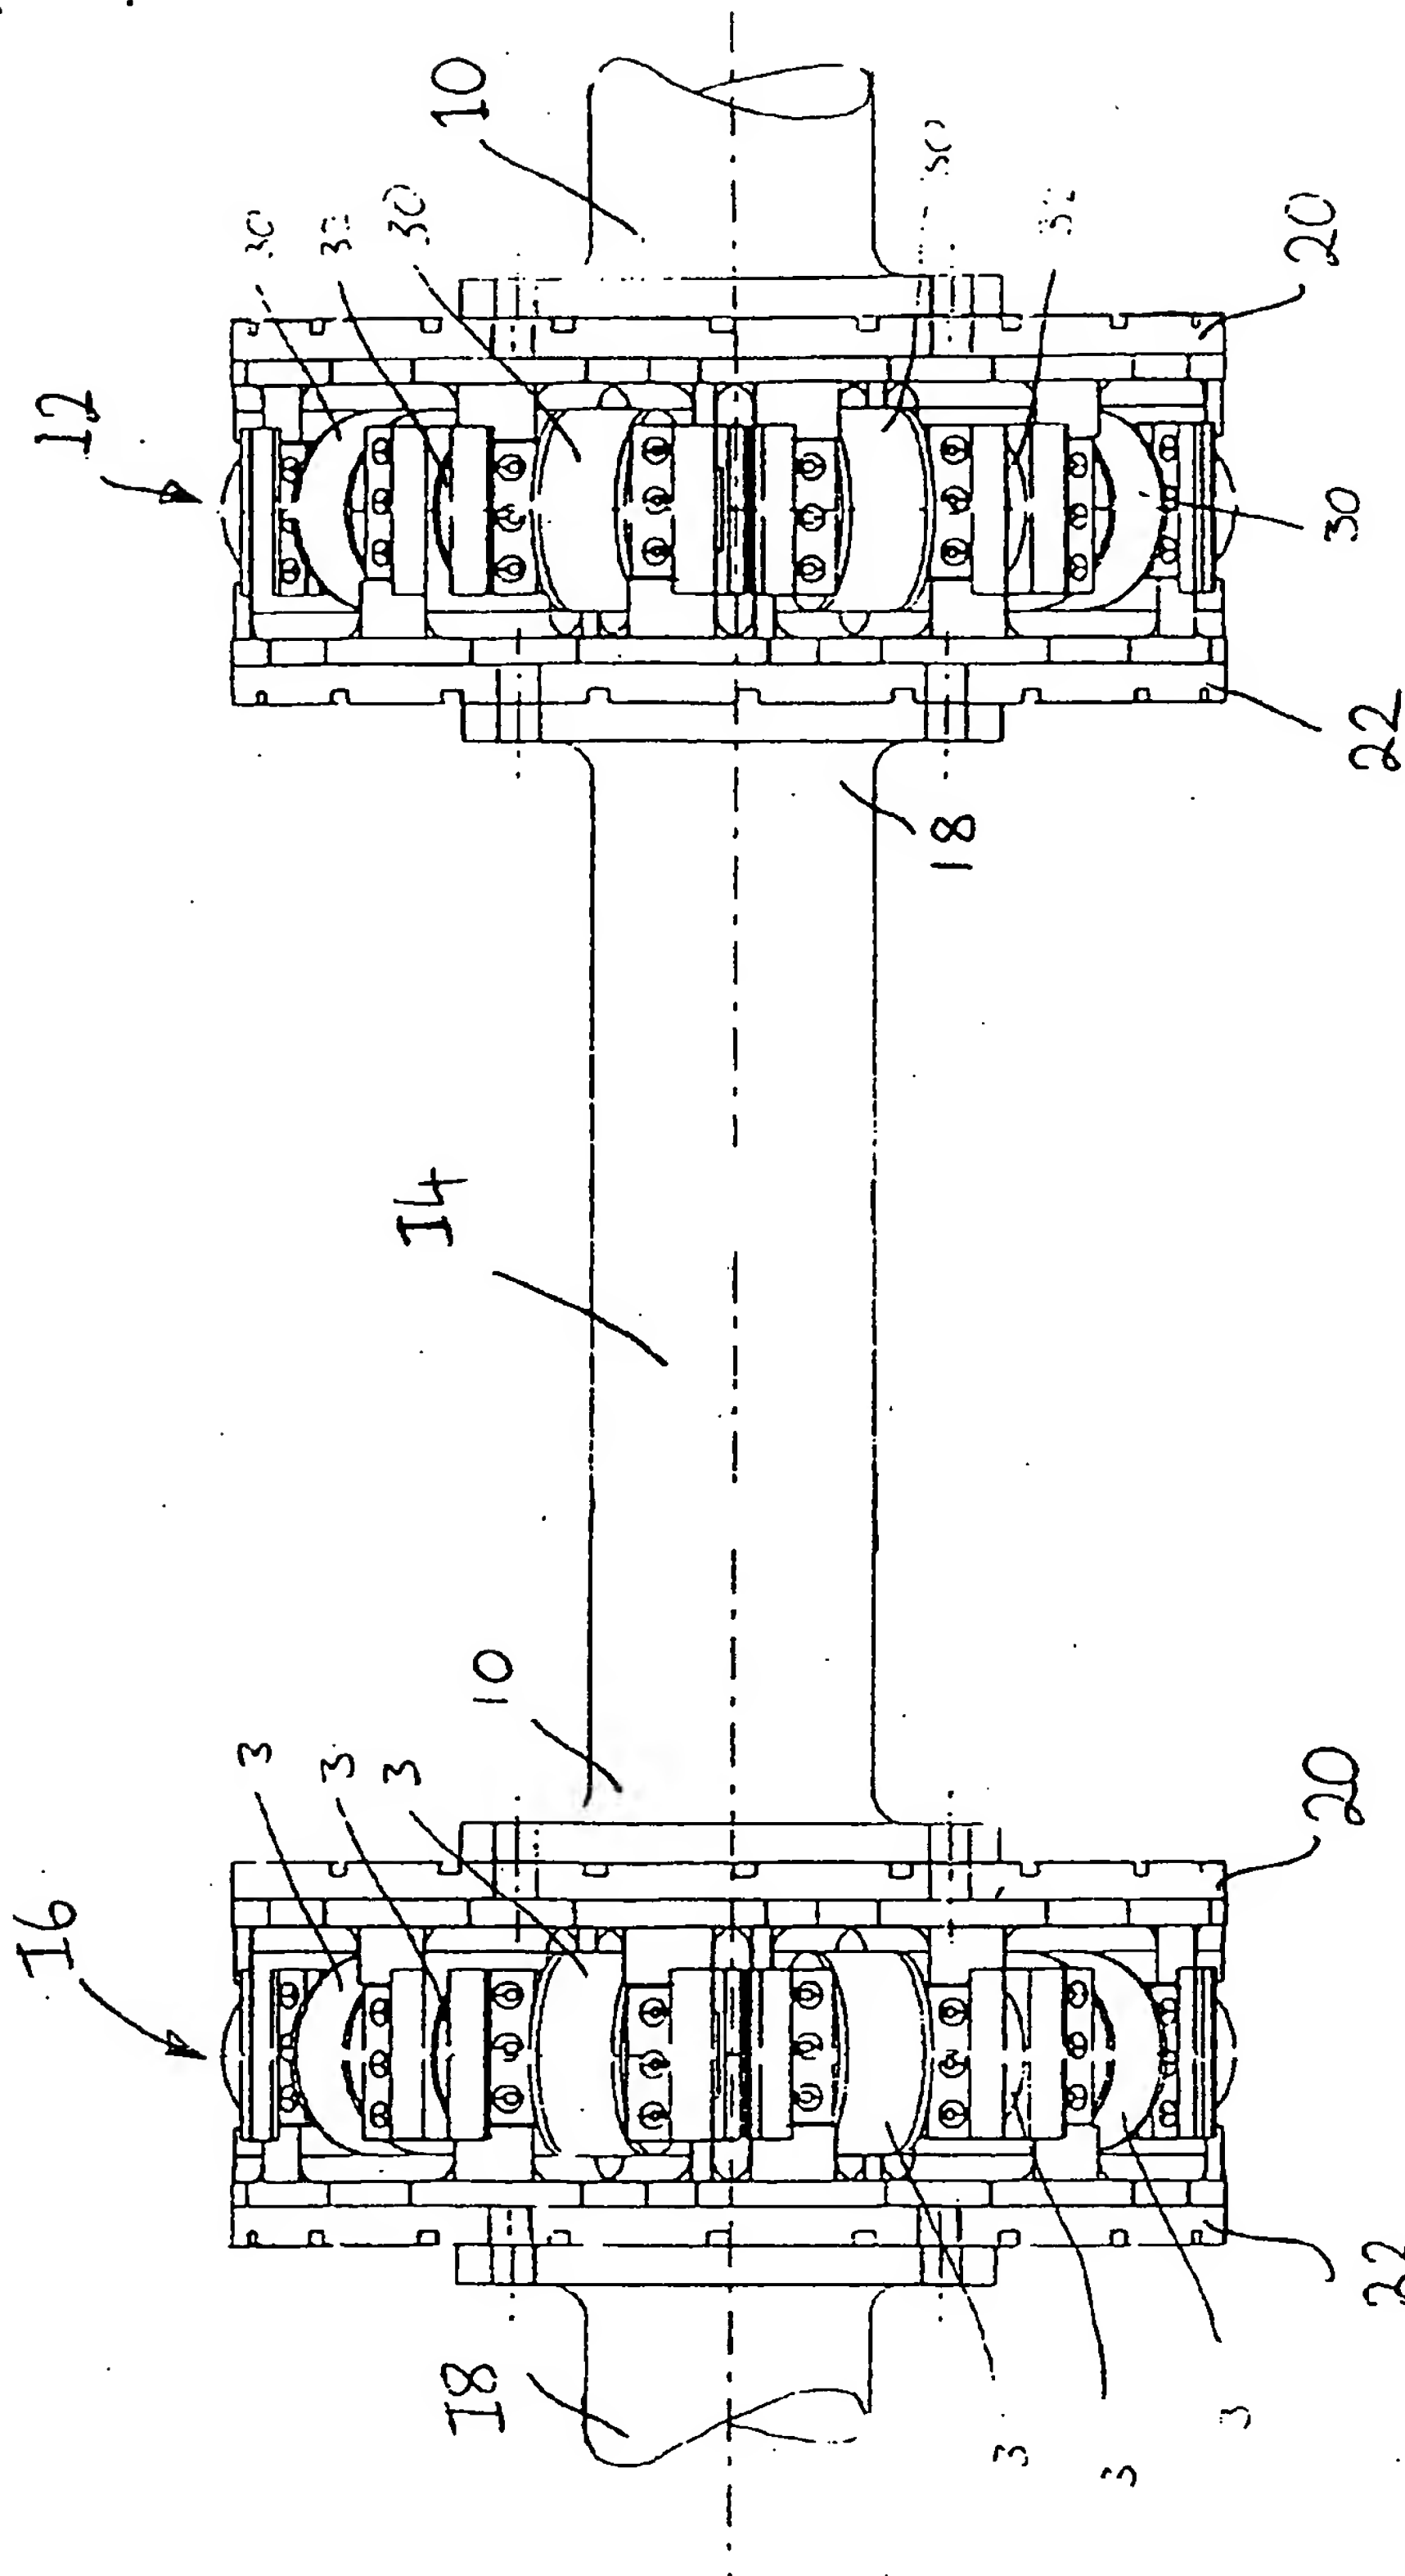


Figure 1.

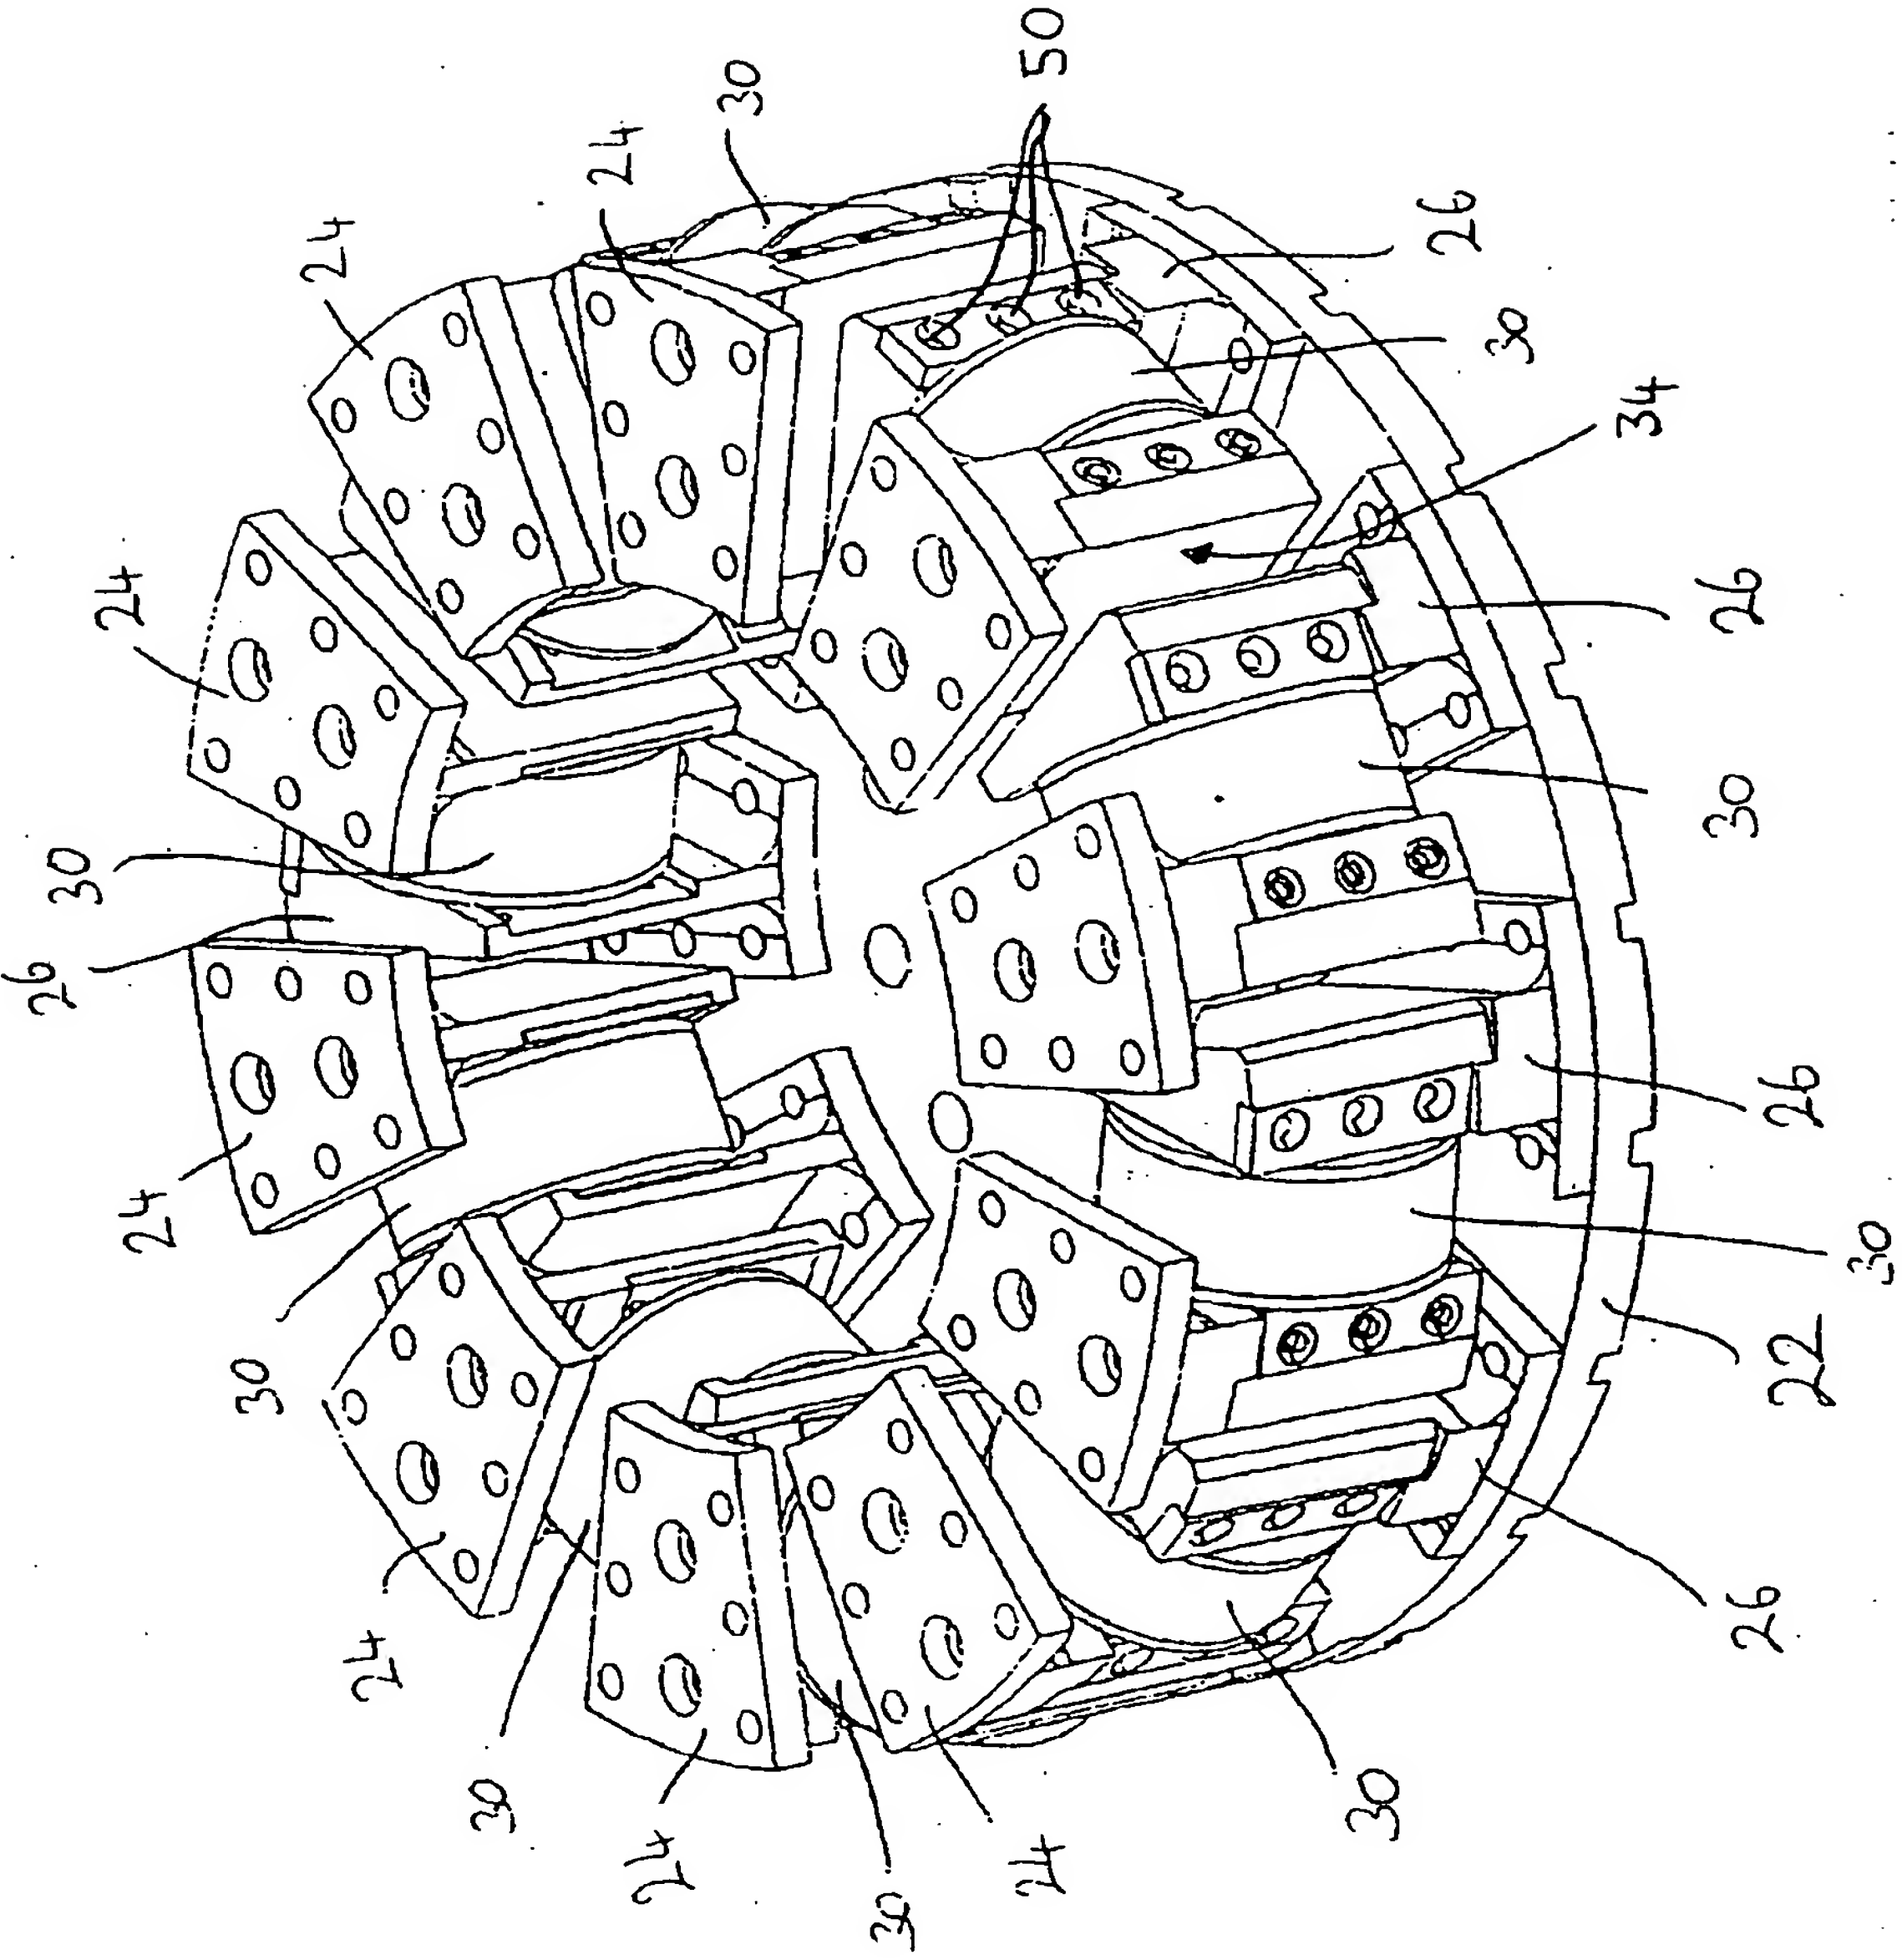


Figure 2

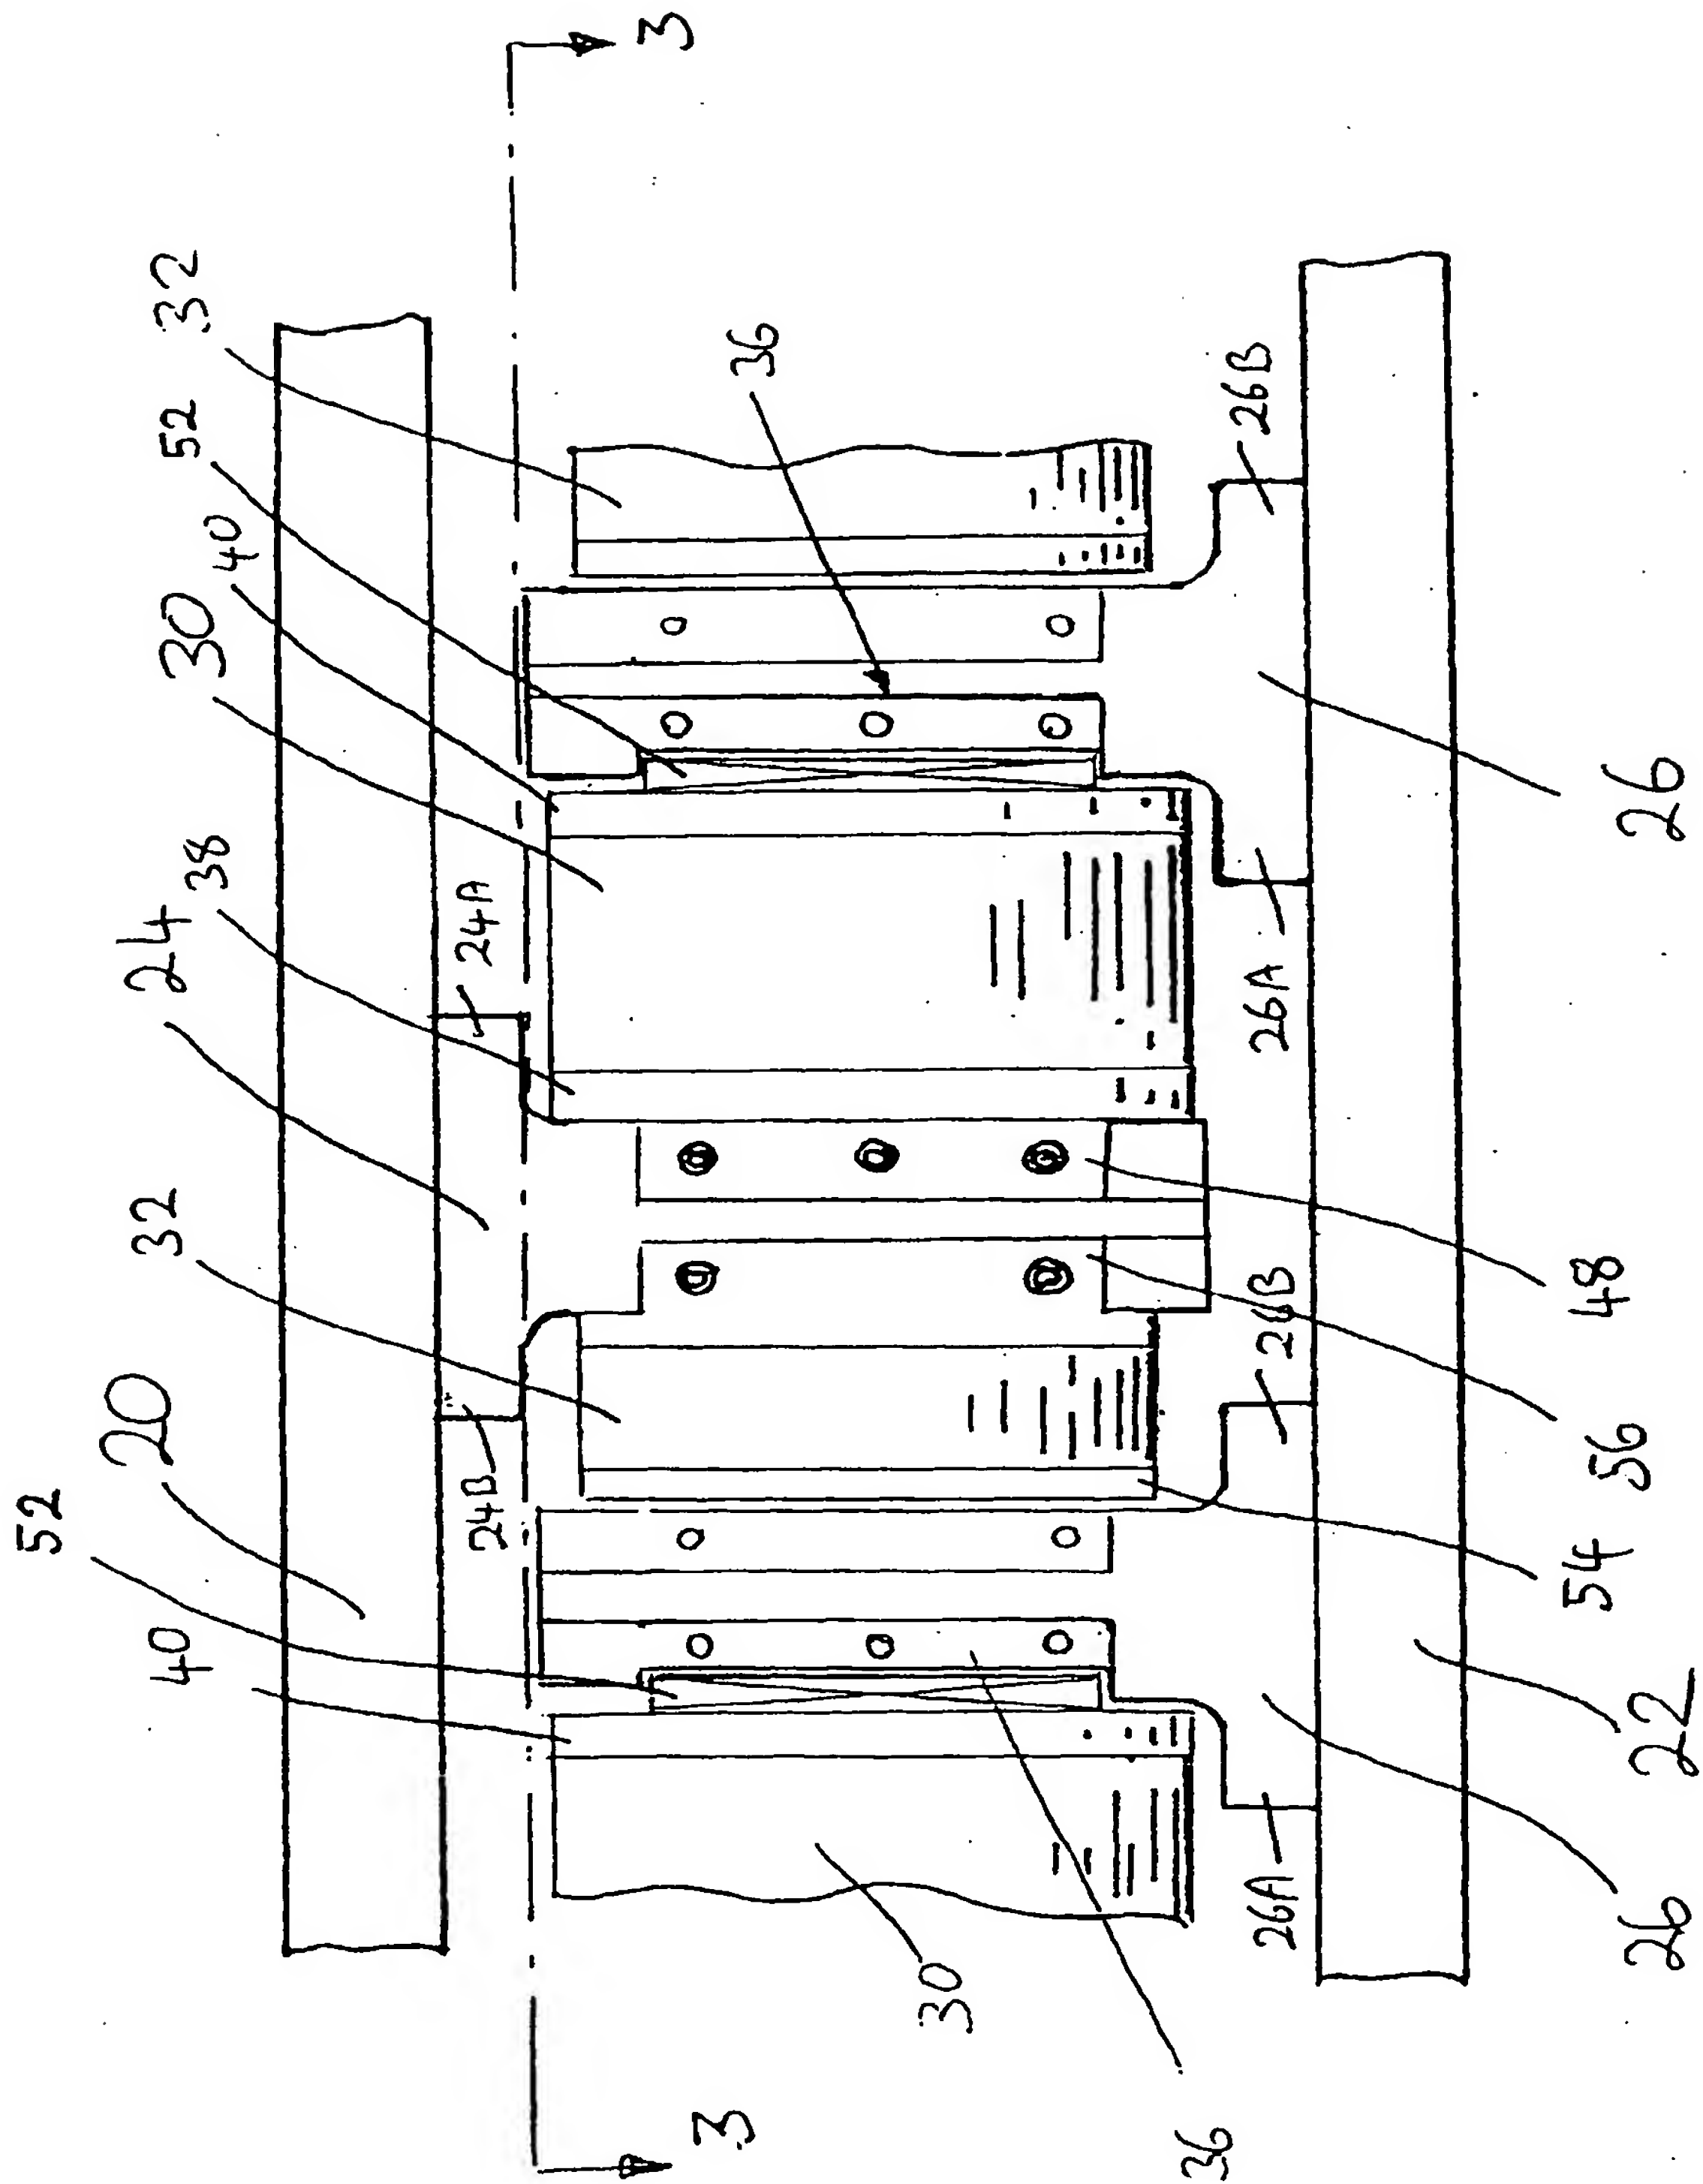


Figure 3

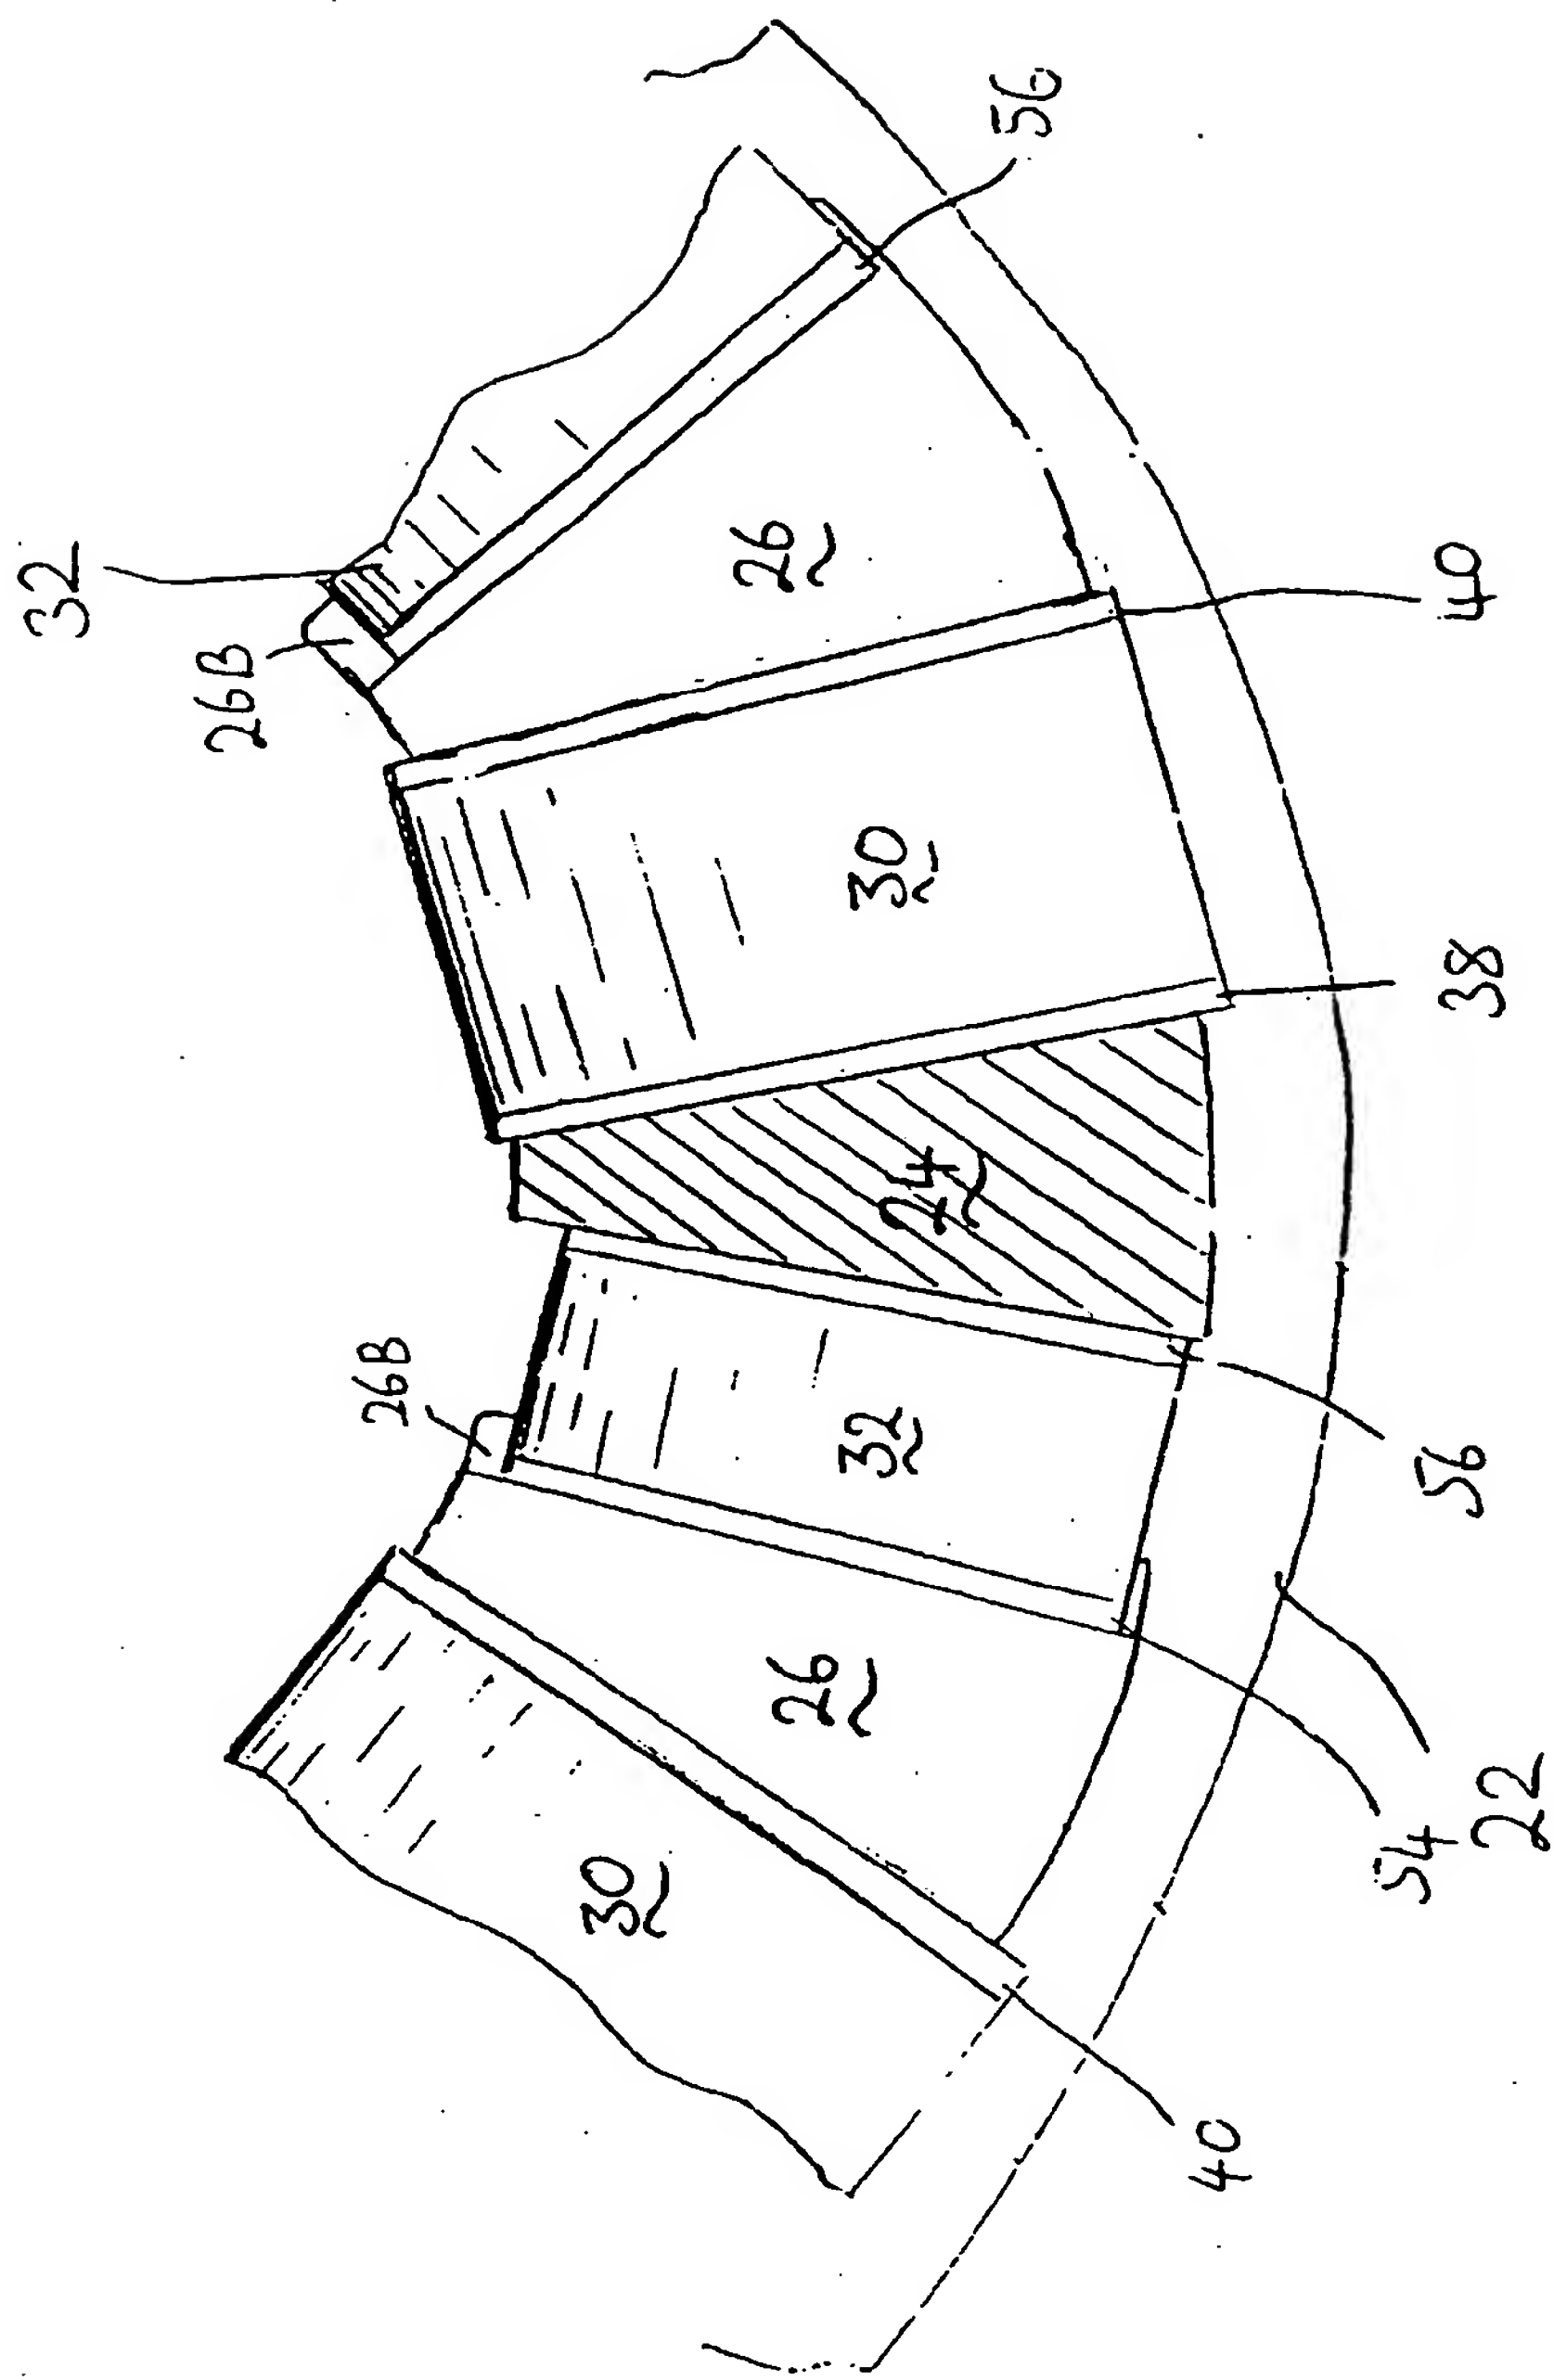


Figure 4

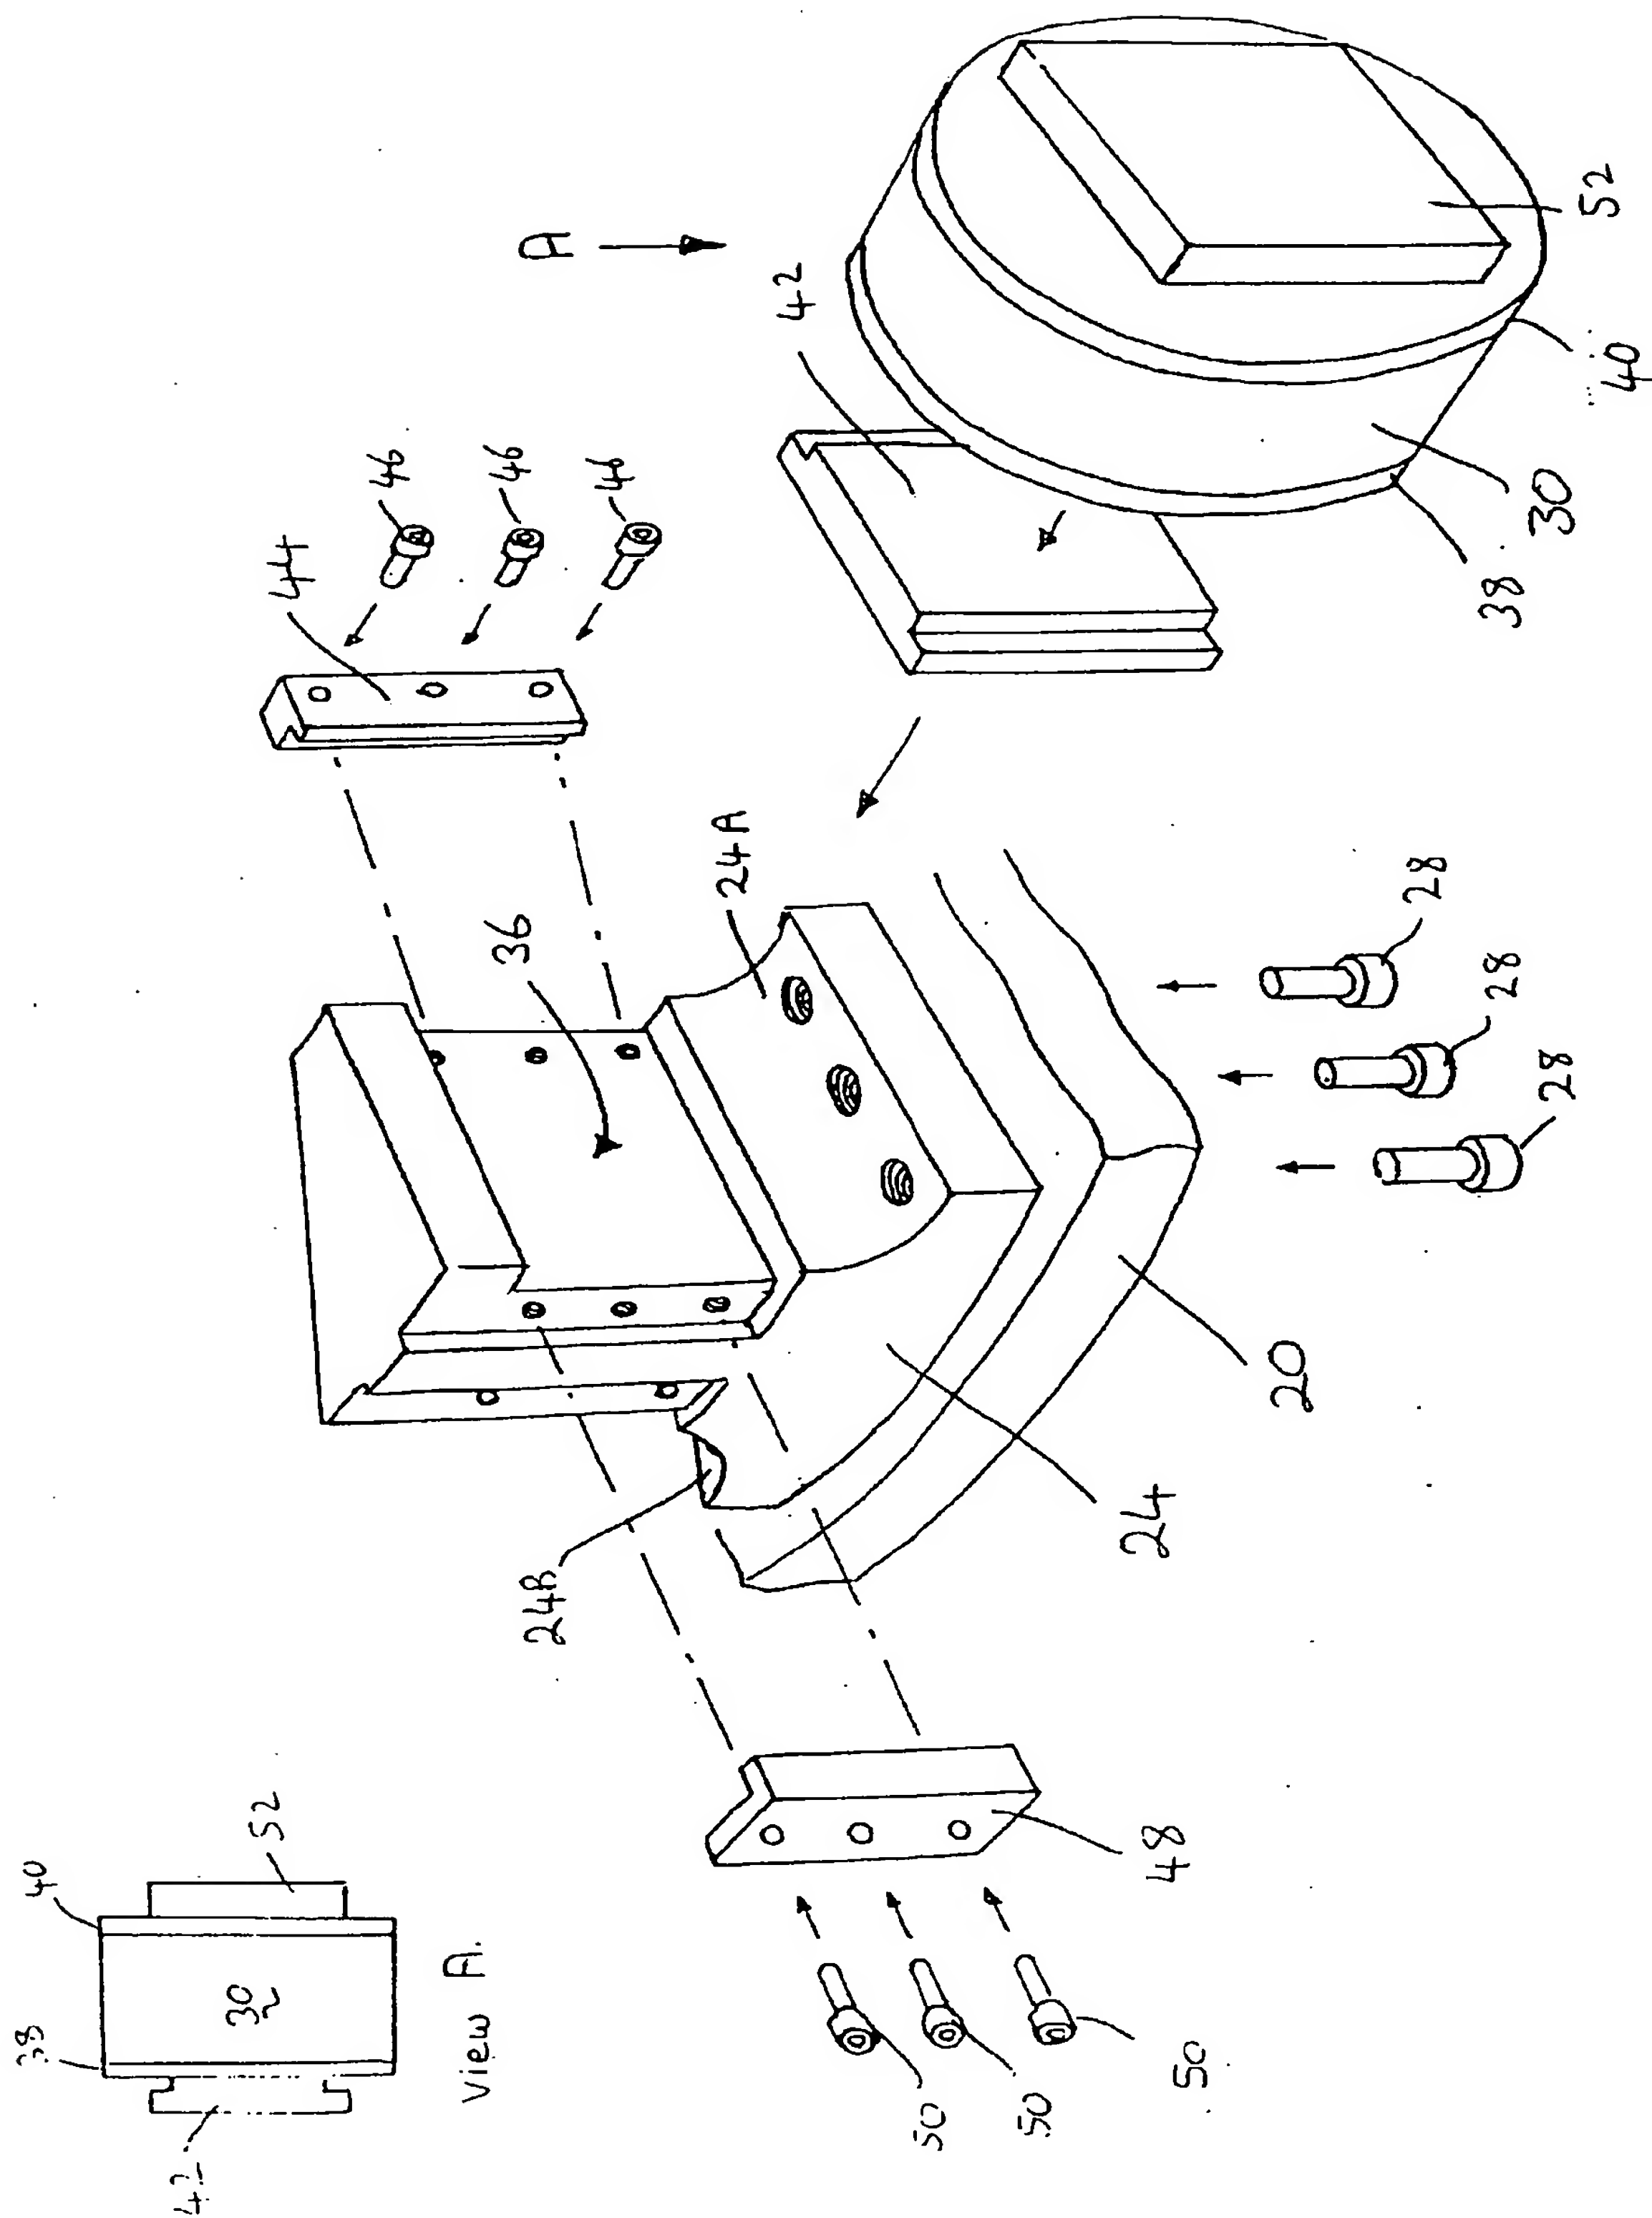


Figure 5

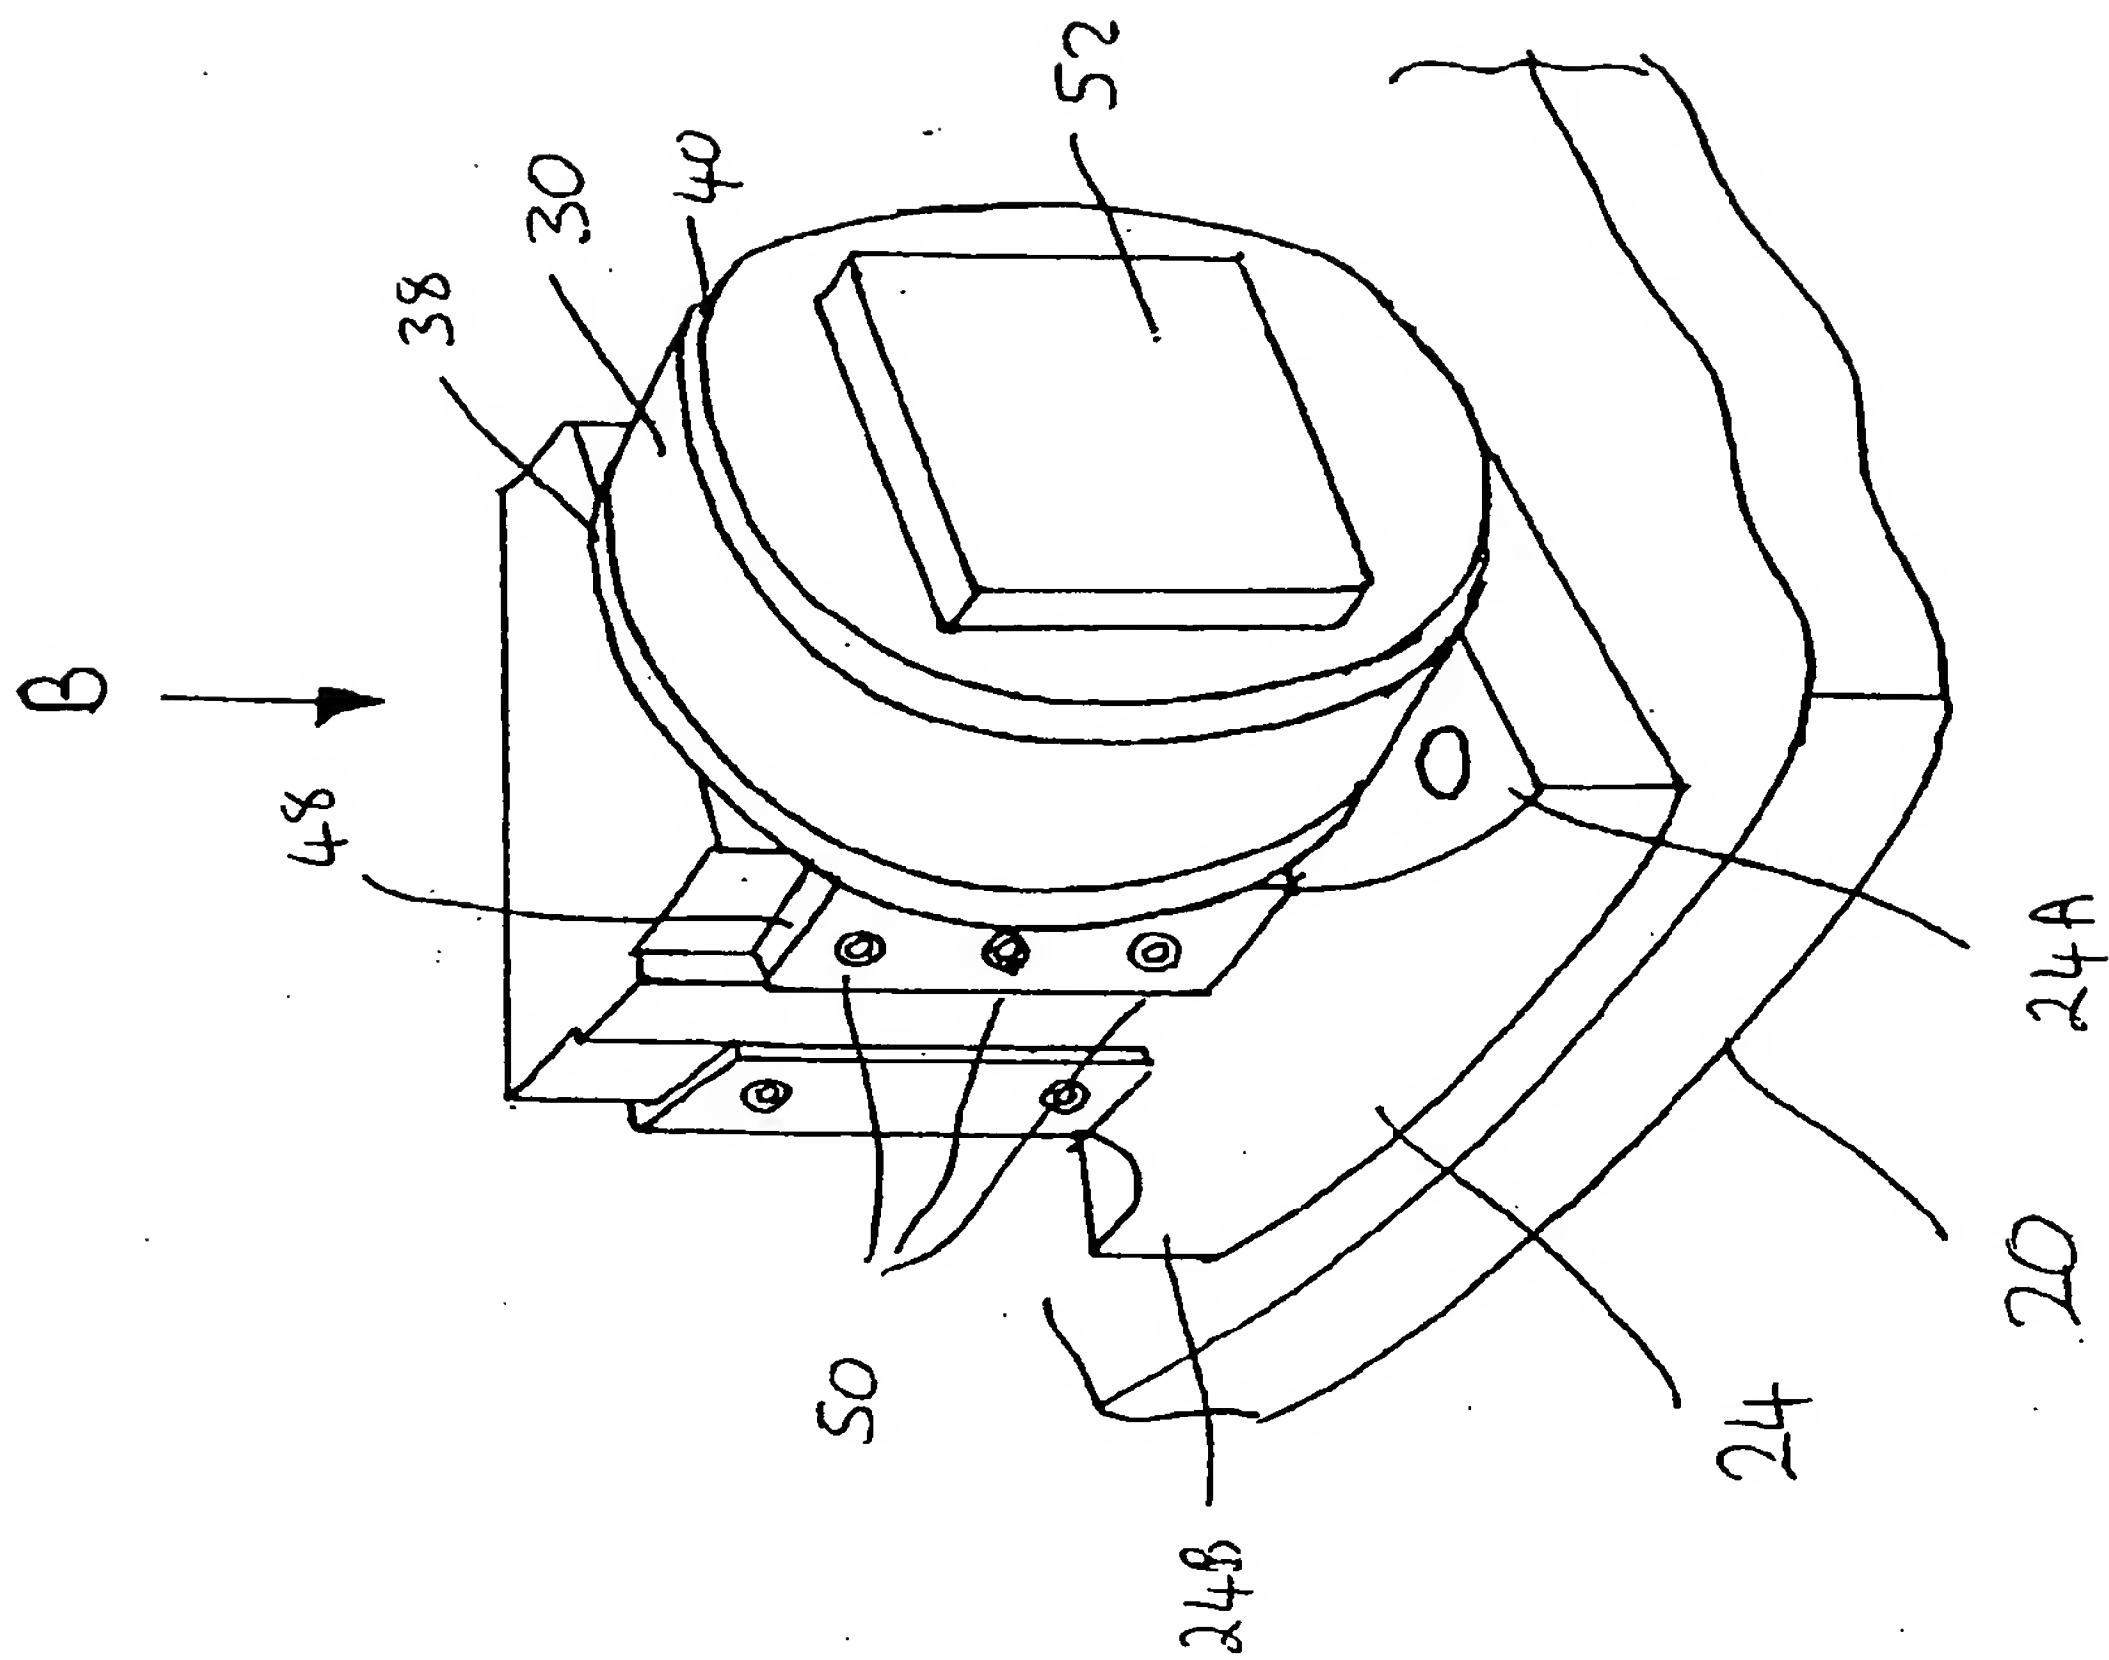


Figure 6

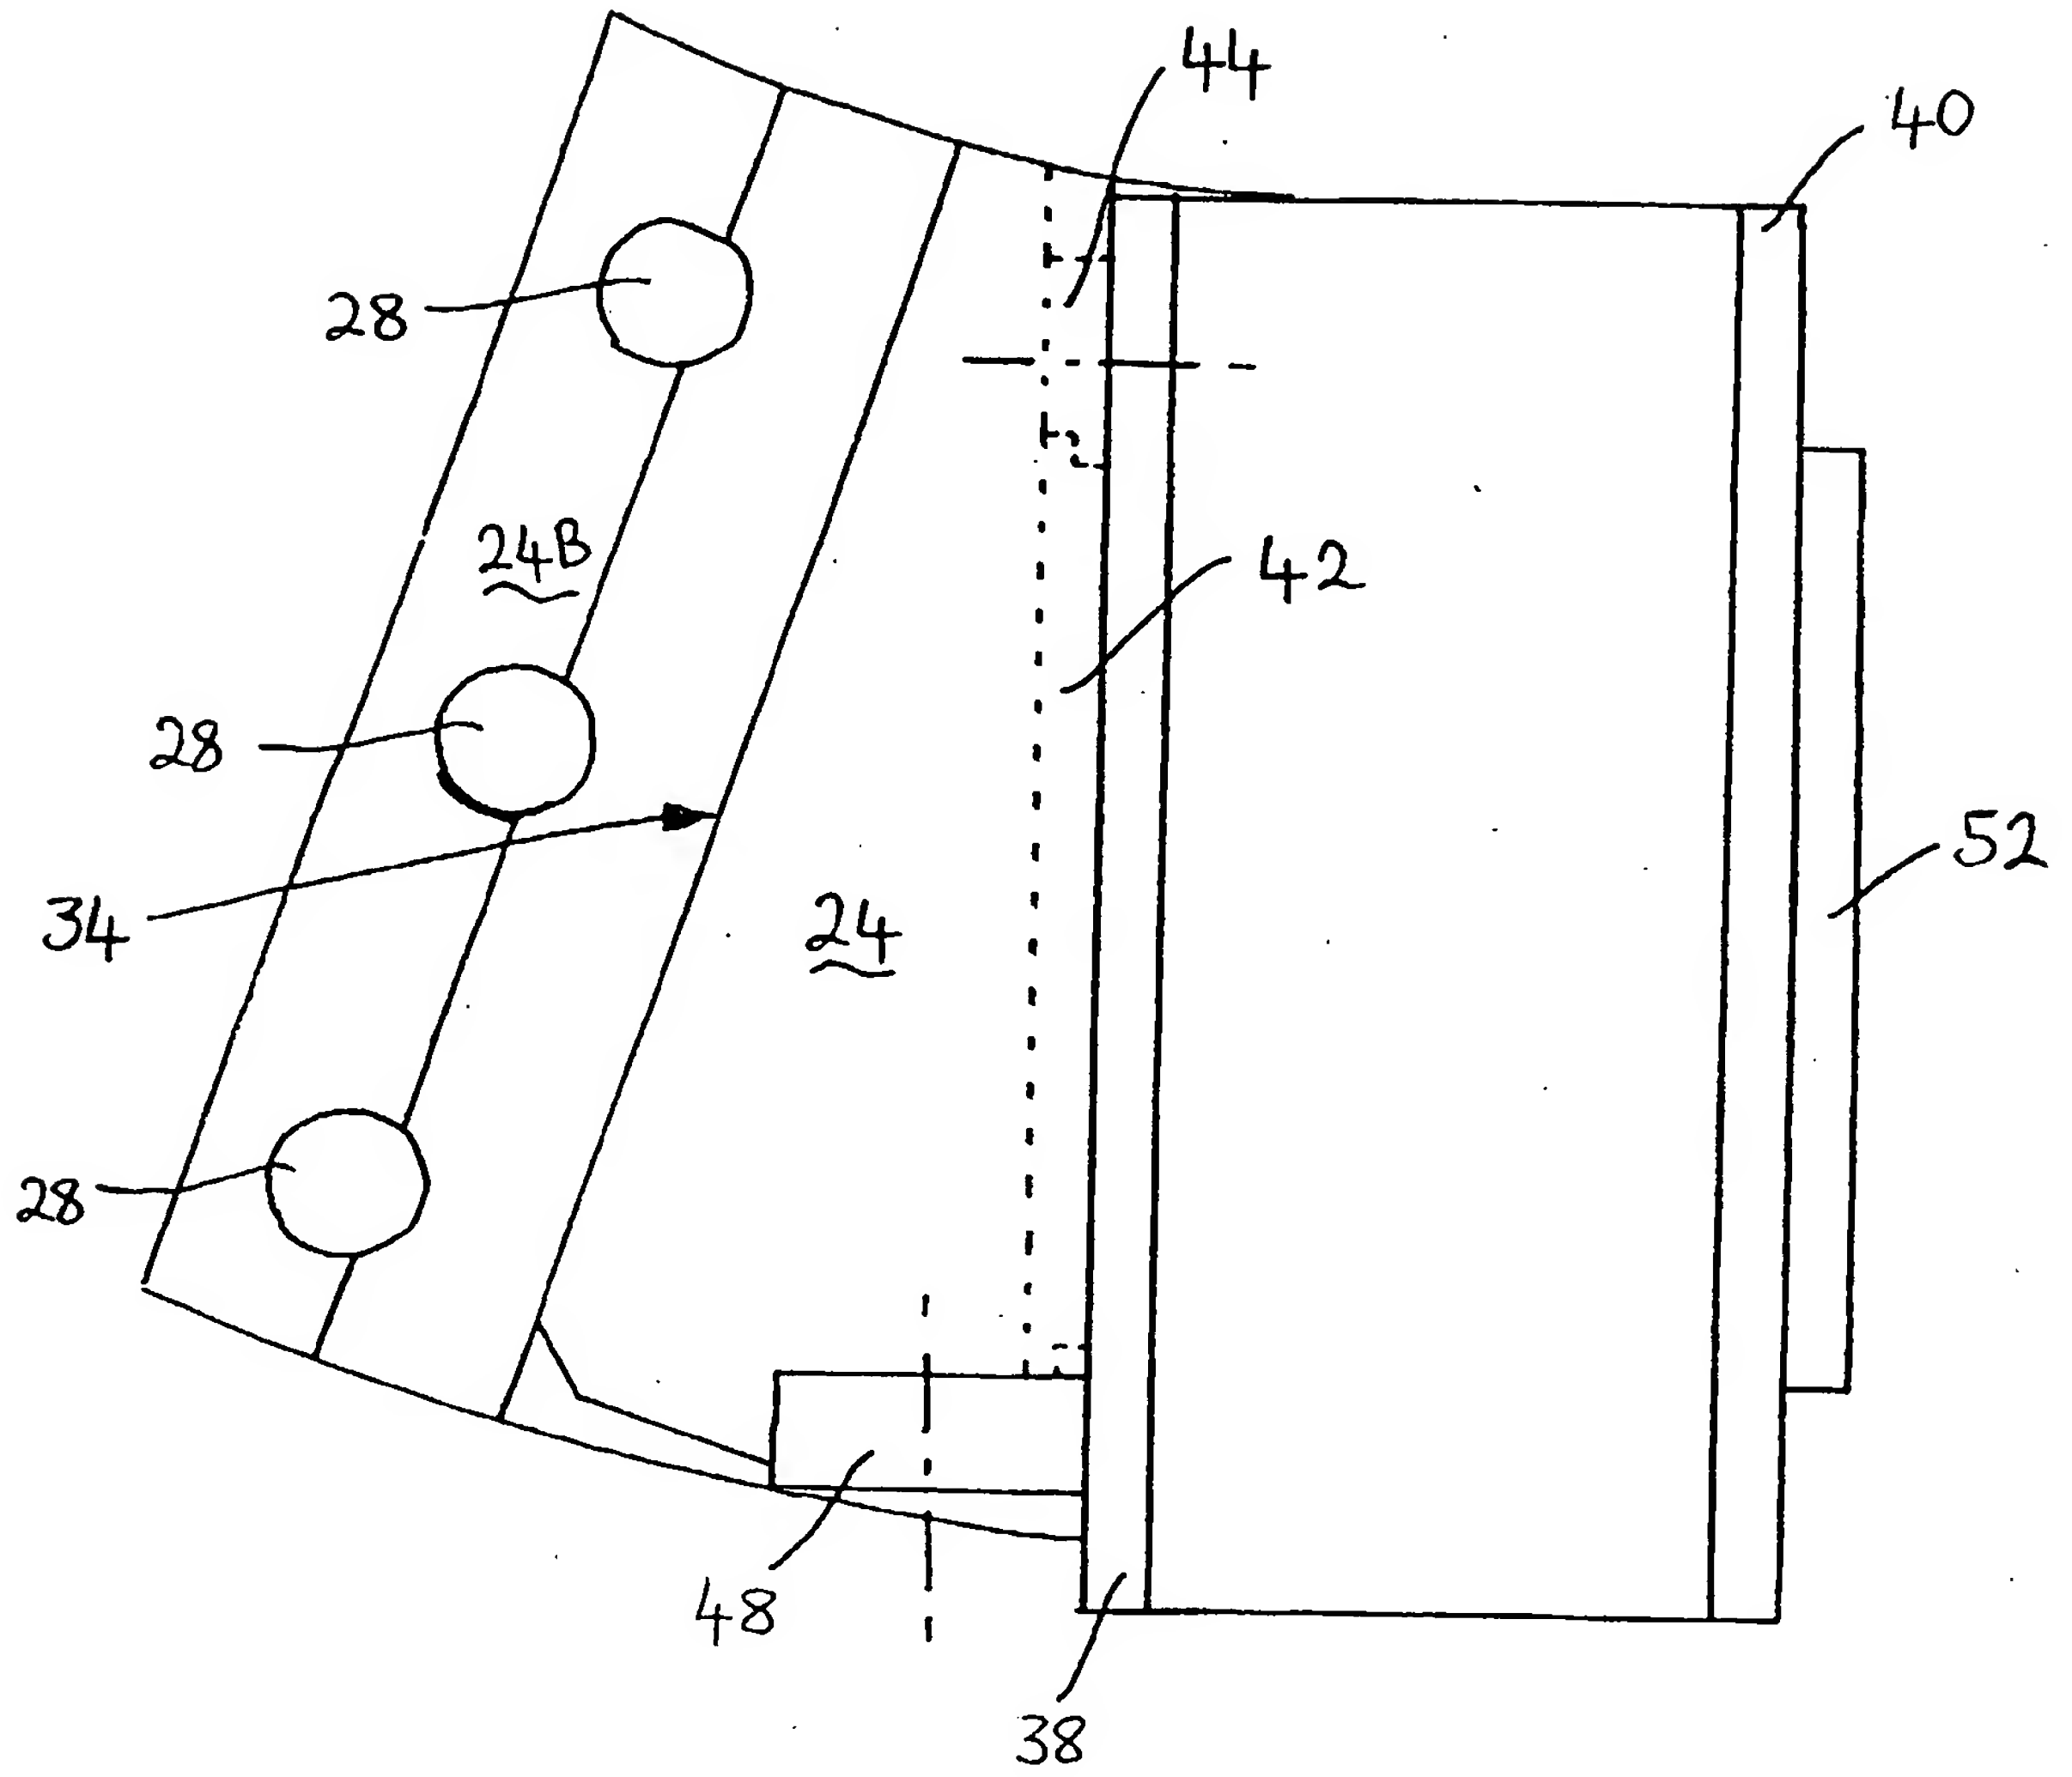


Figure 7

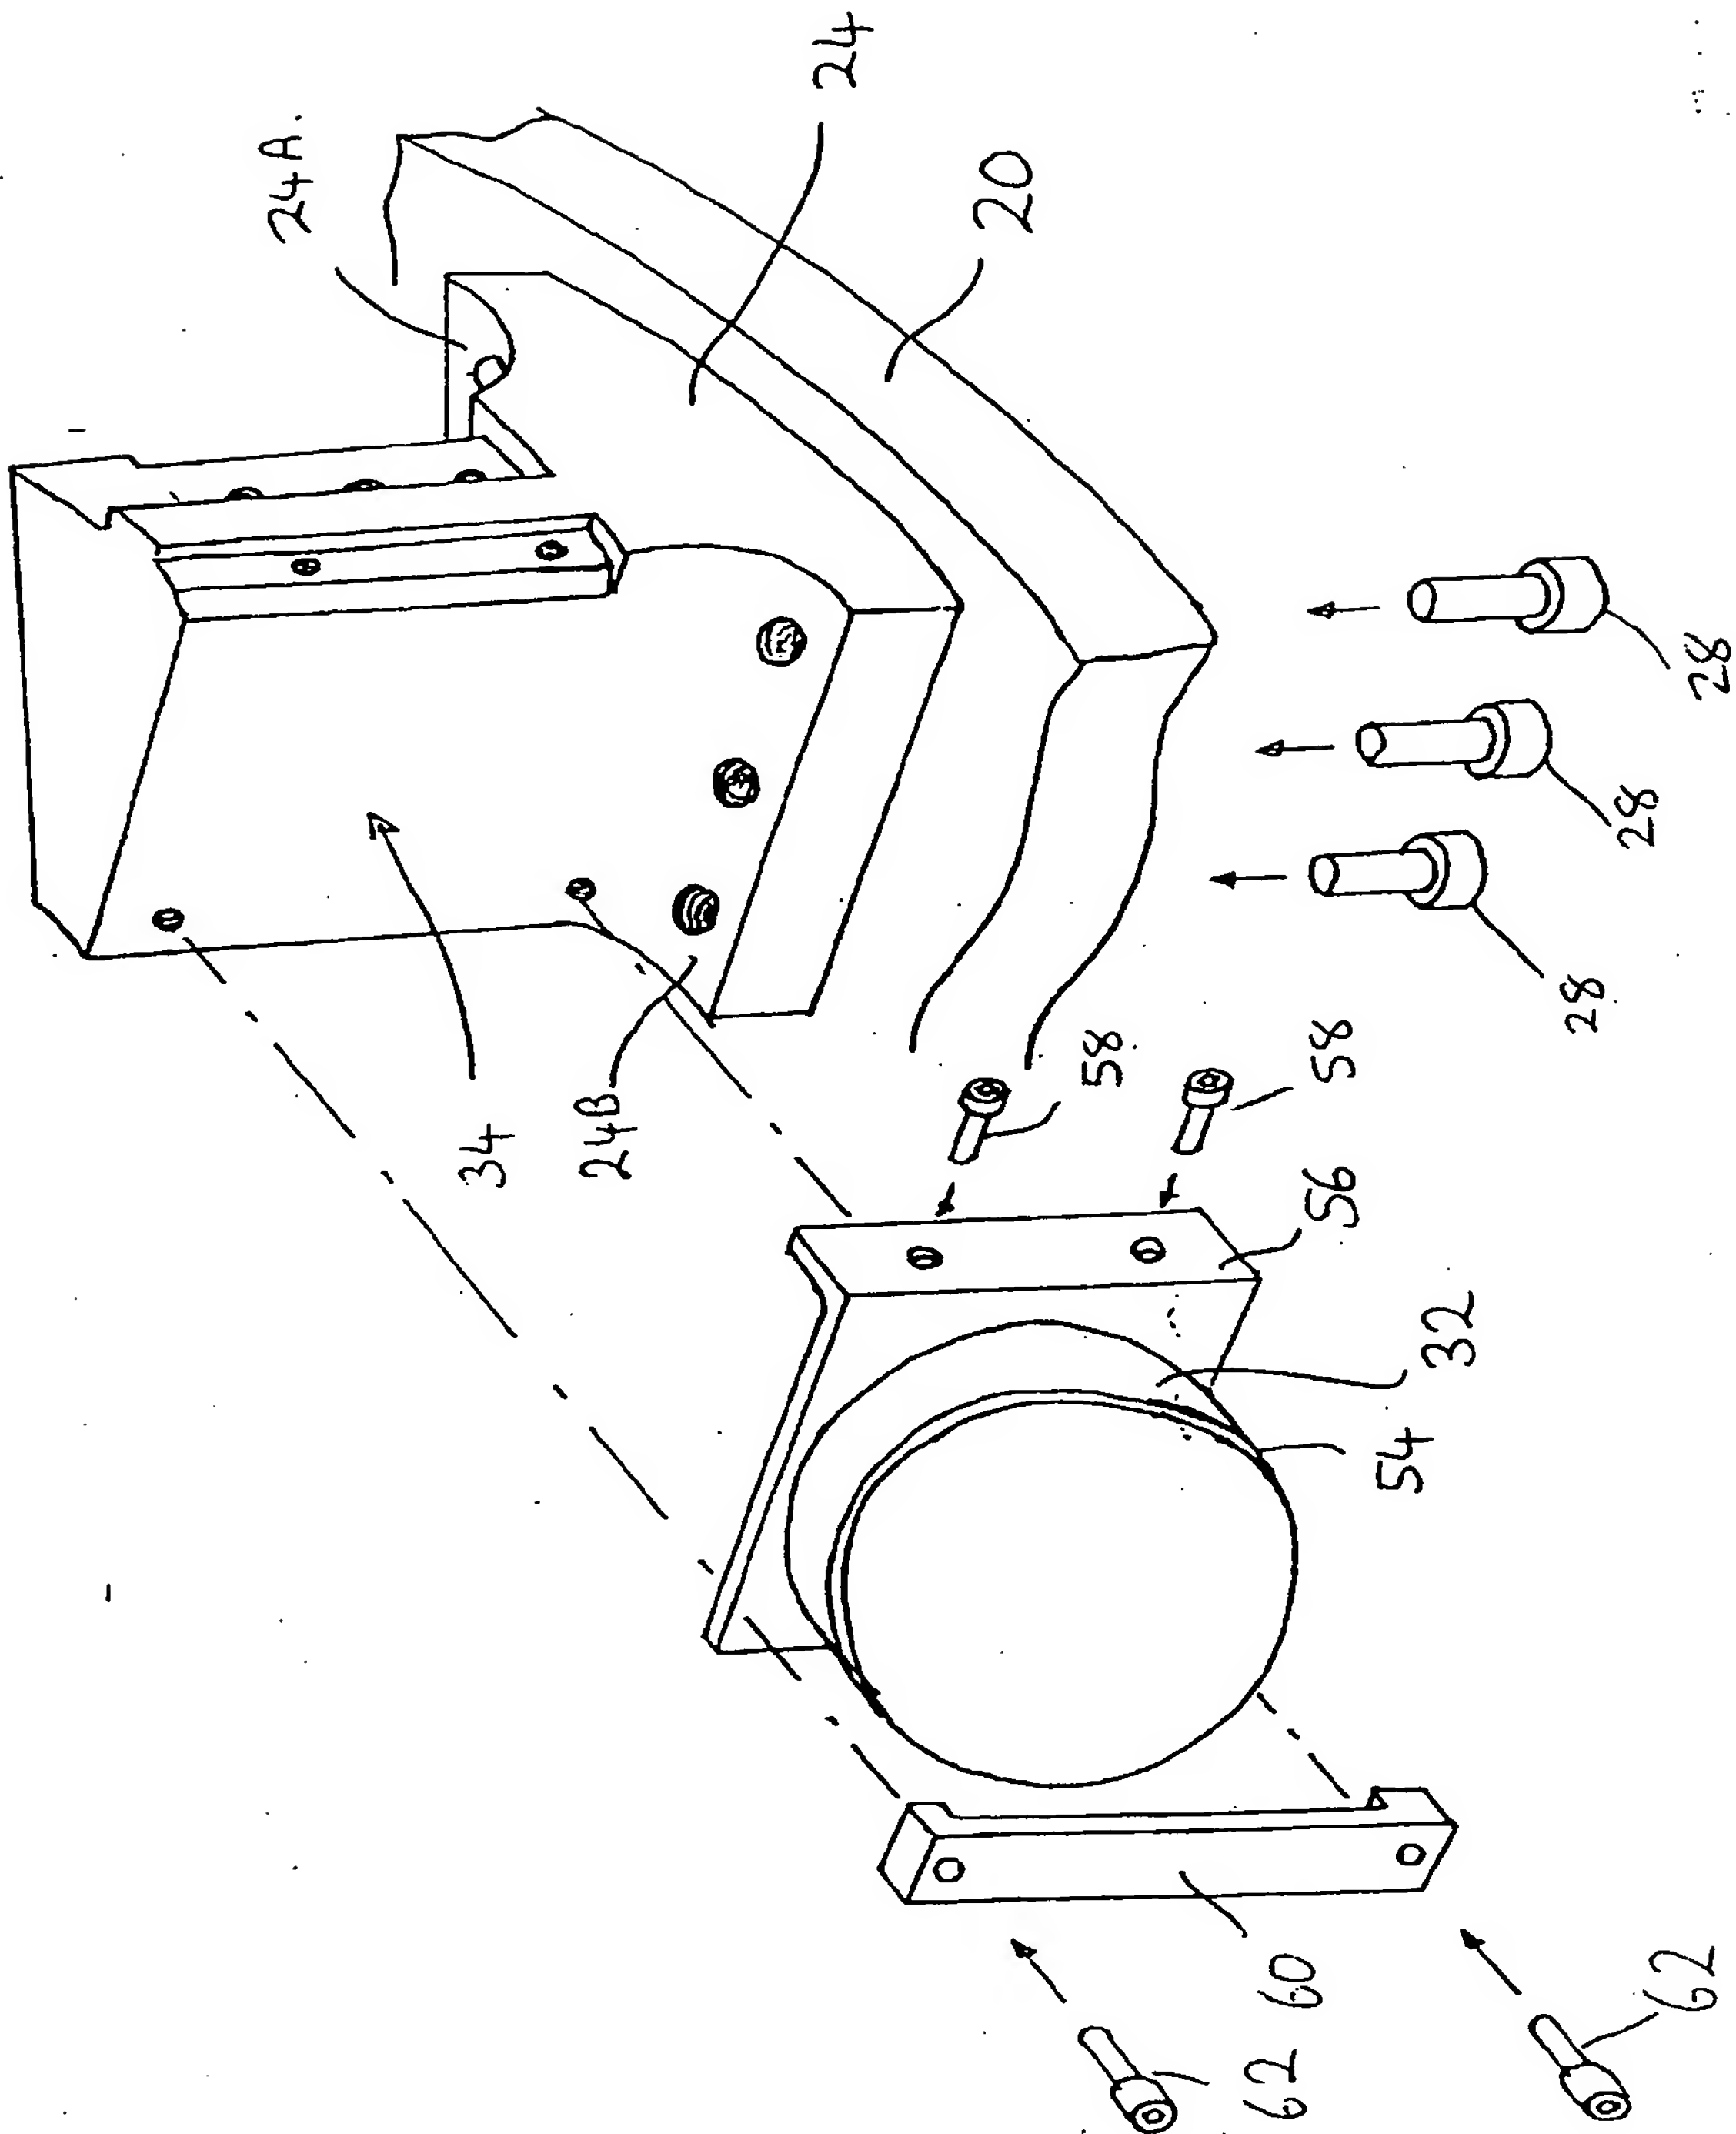


Figure 8

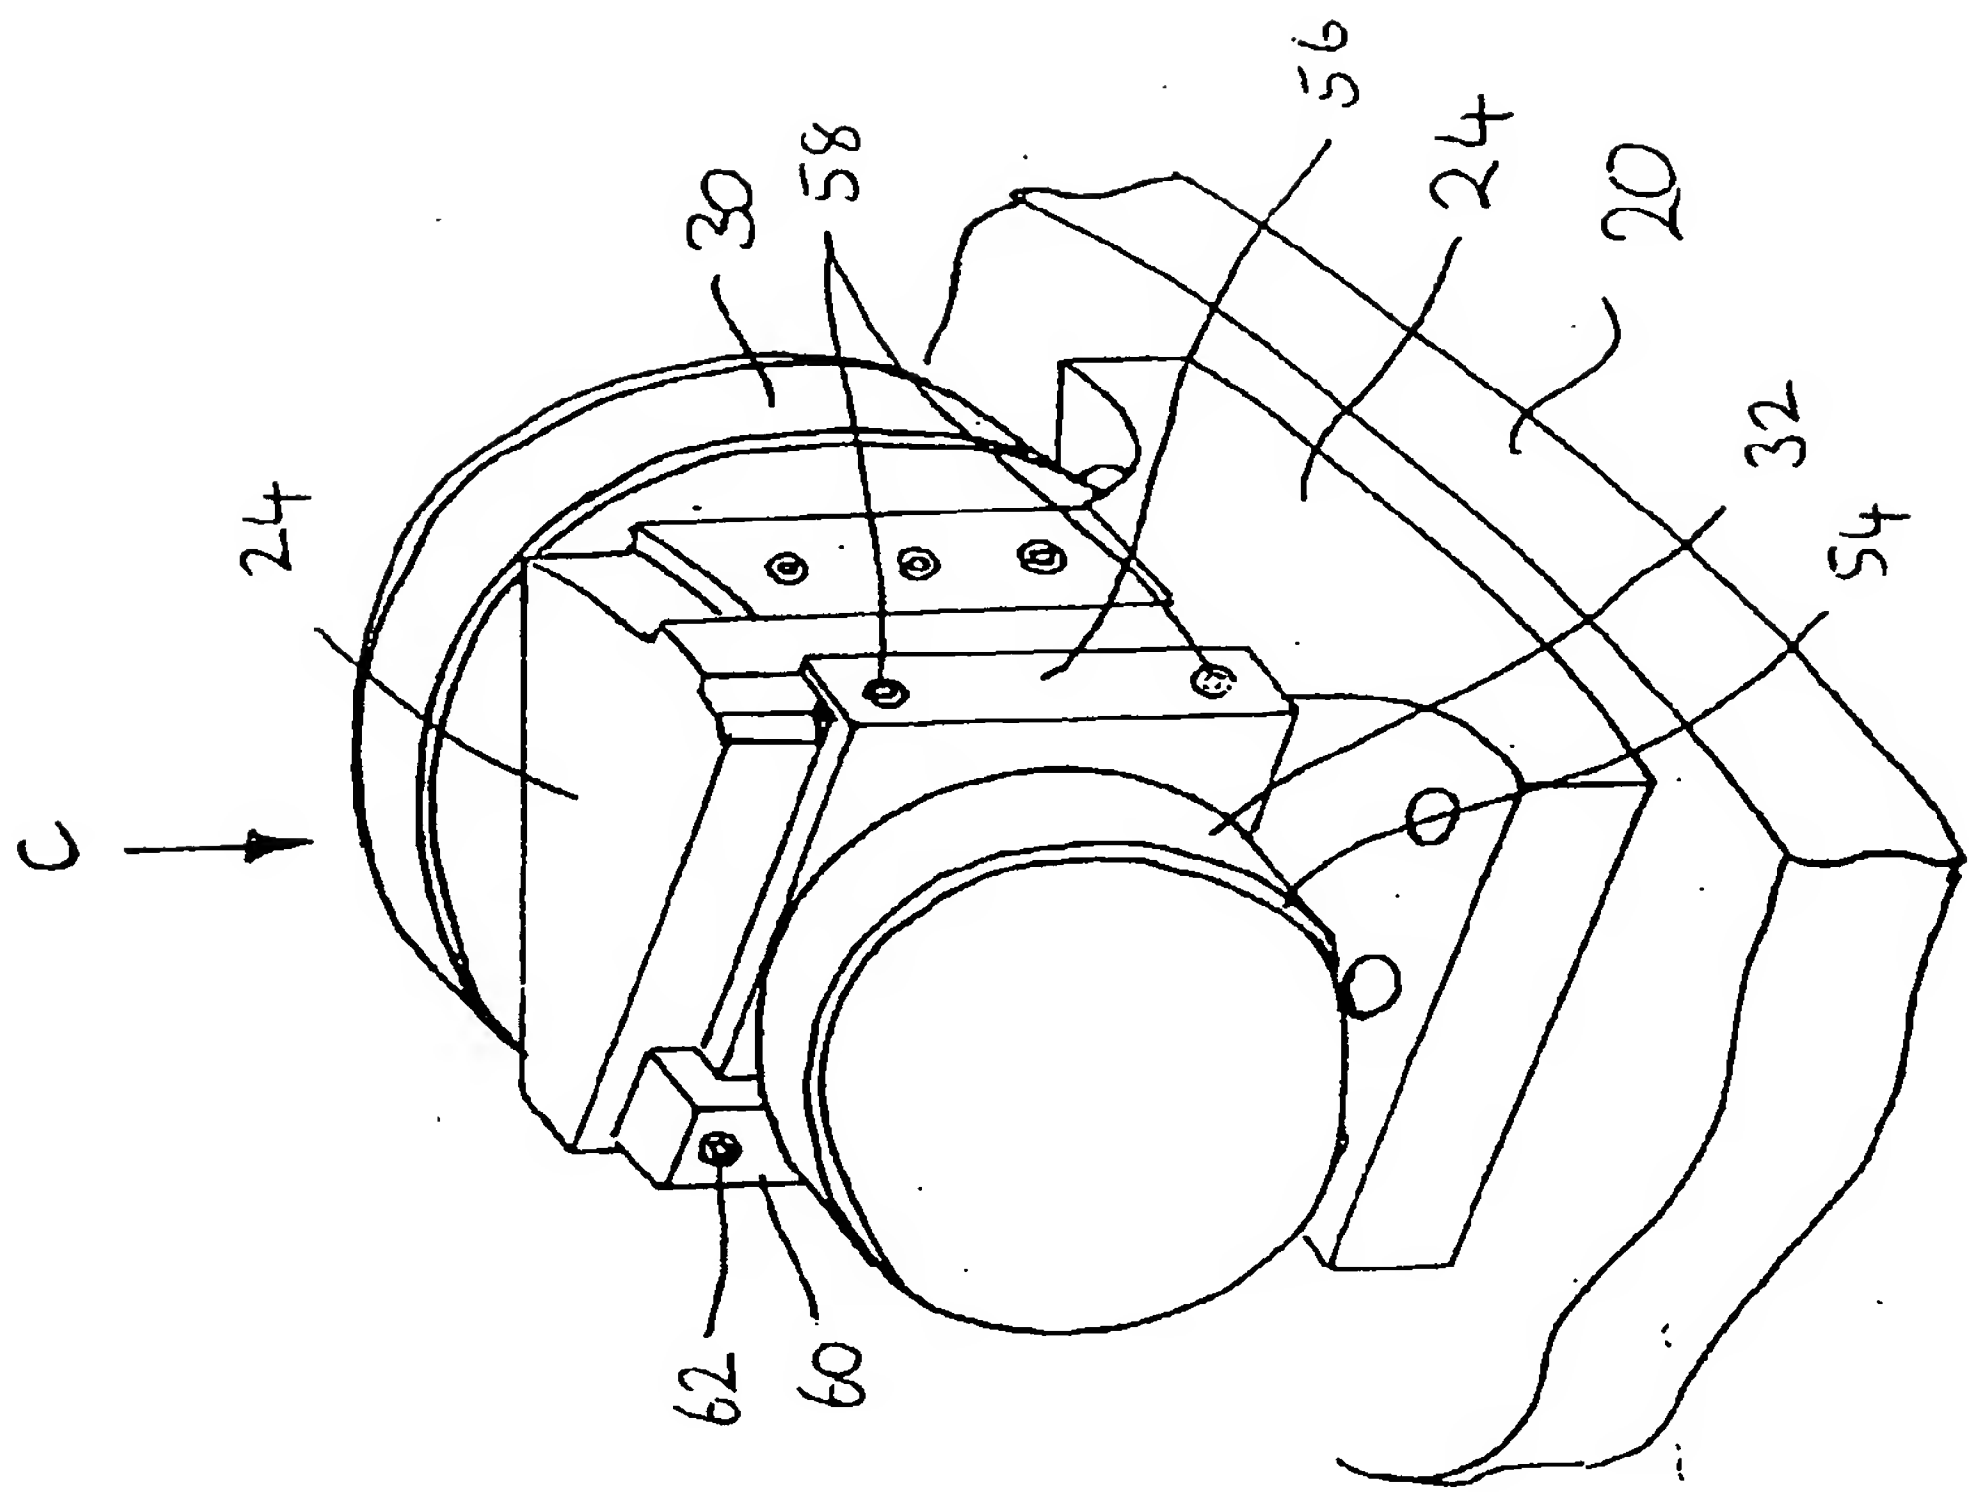


Figure 9

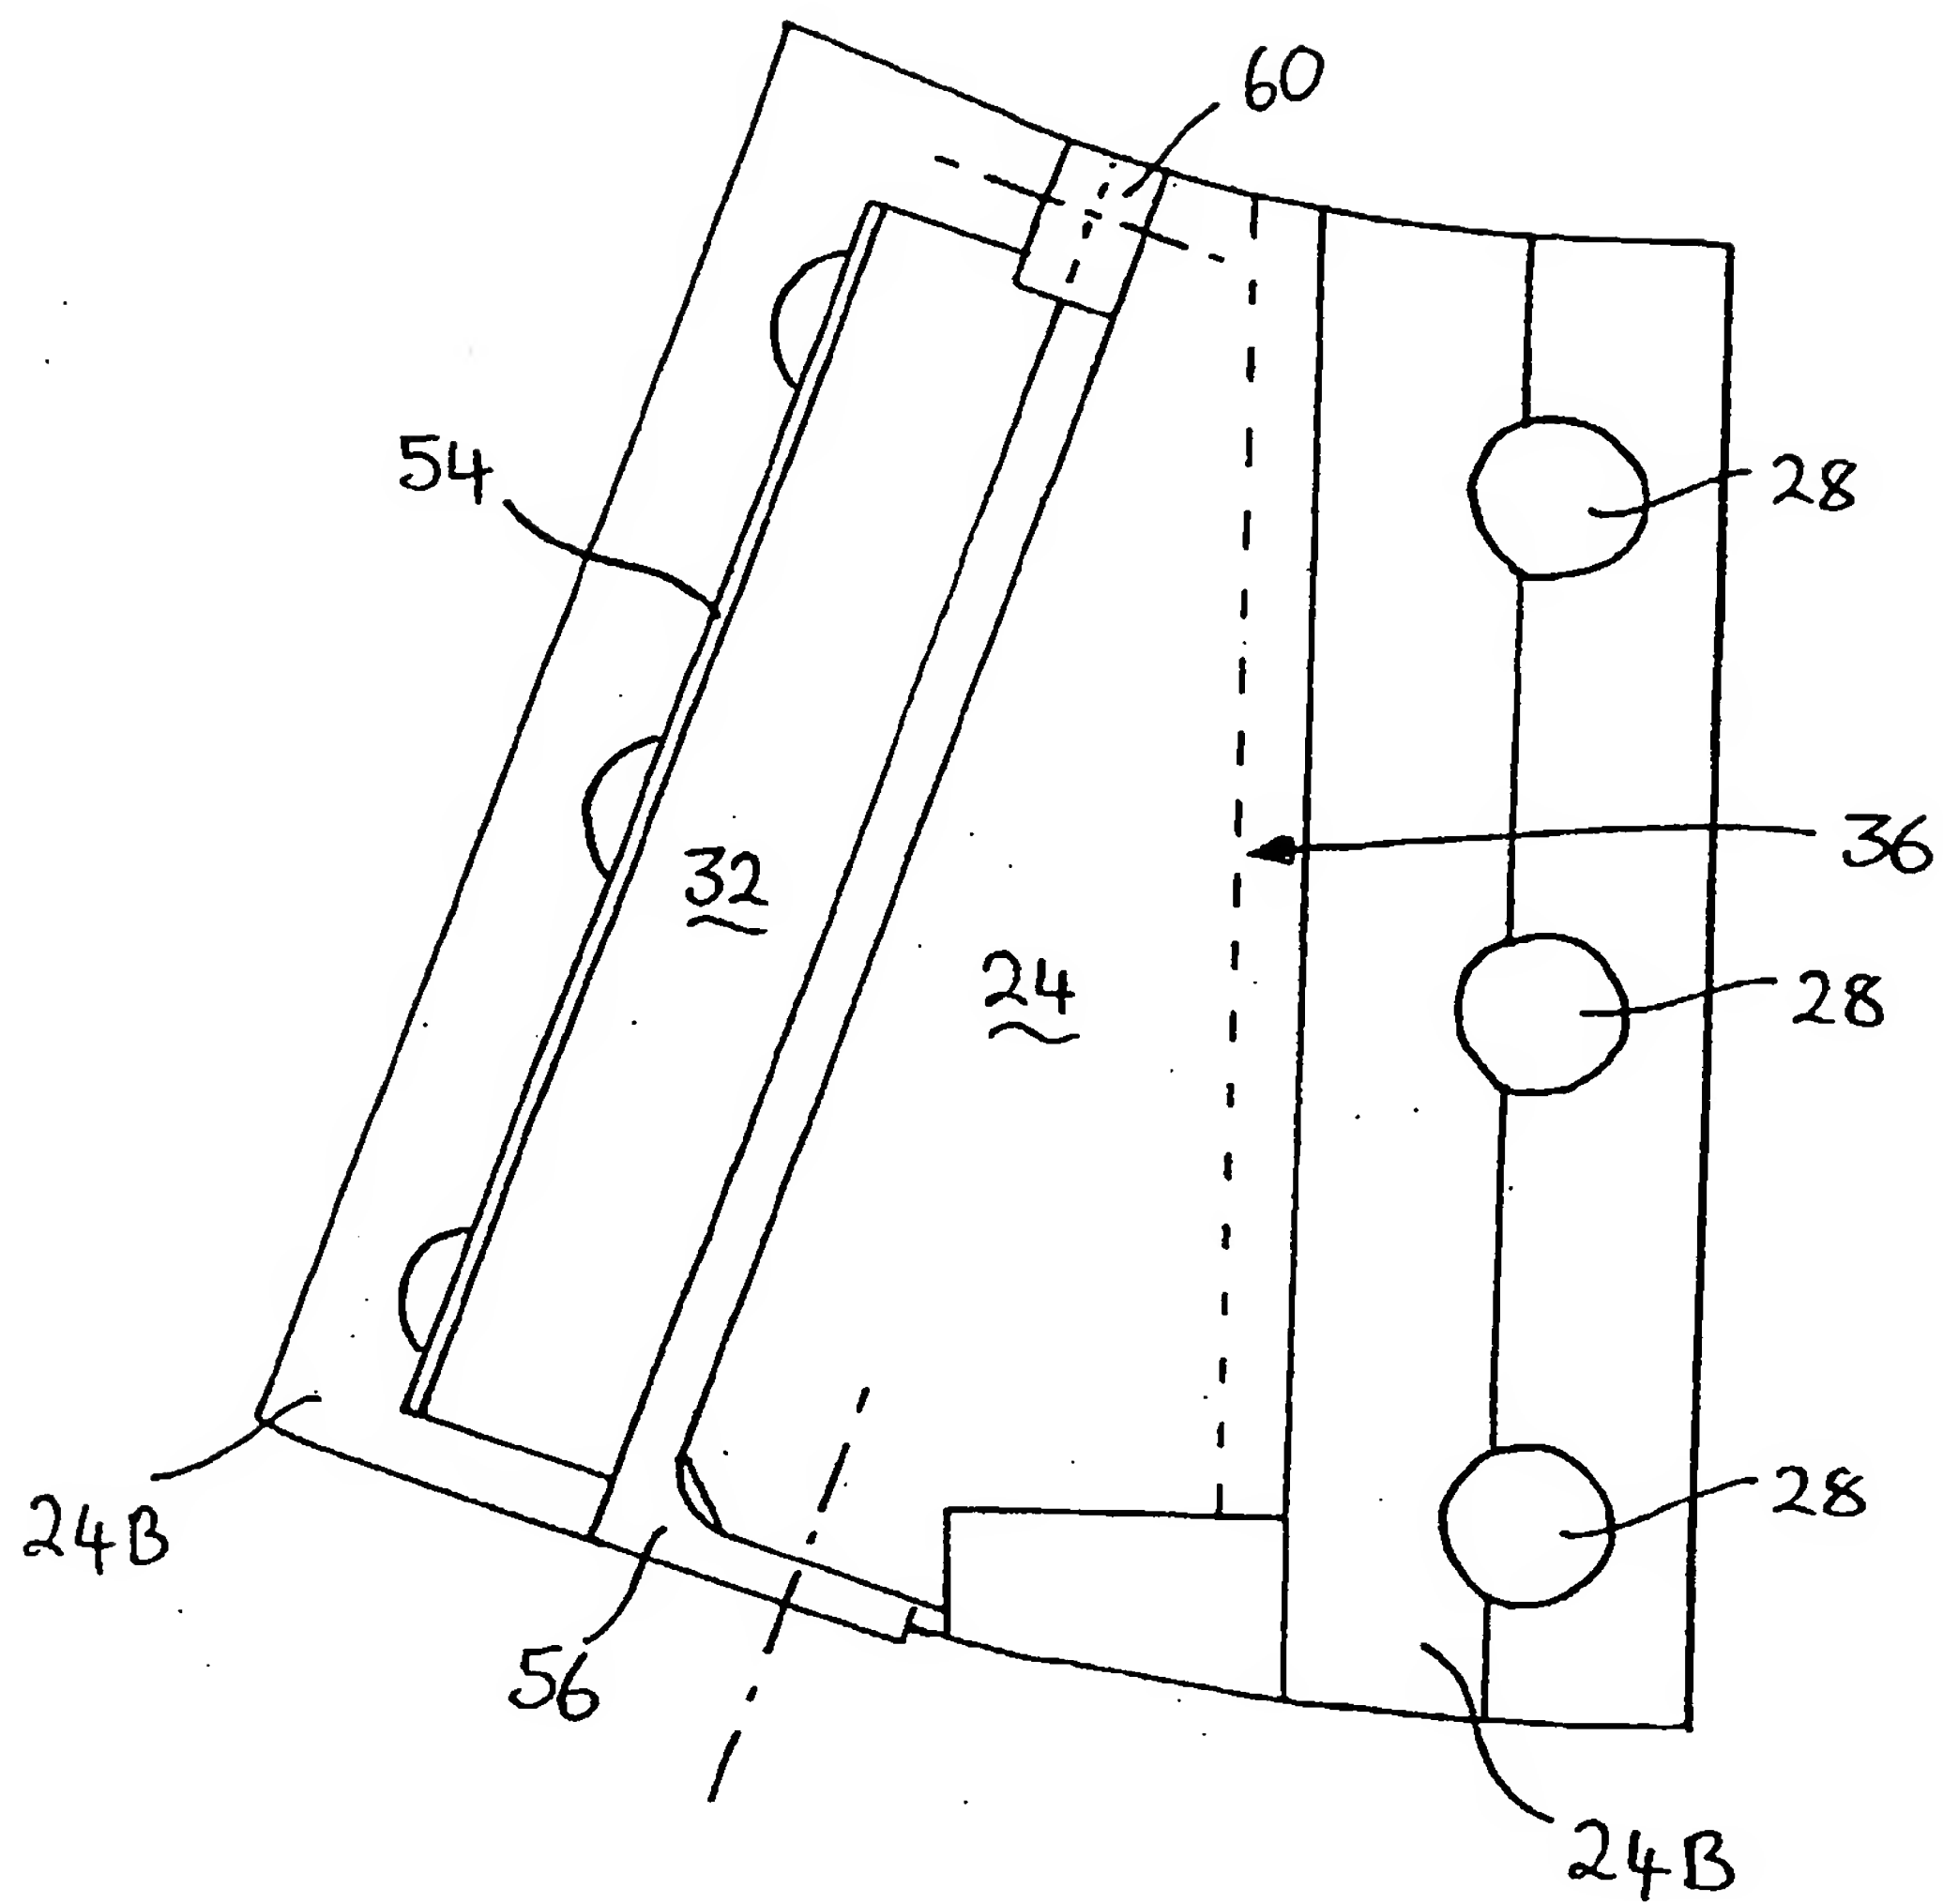


Figure 10

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 937 902 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
06.09.2000 Bulletin 2000/36

(51) Int Cl.7: **F16D 3/74, F16D 3/68, F16D 3/78**

(43) Date of publication A2:
25.08.1999 Bulletin 1999/34

(21) Application number: **99301184.0**

(22) Date of filing: **17.02.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **20.02.1998 GB 9803627**

(71) Applicant: **Marconi Marine (VSEL) Limited,**
(formerly Vickers Shipbuilding & Engineering Limited)
Cumbria LA14 1AF (GB)

(72) Inventors:
• **Murrell, Peter William**
Barrow In Furness, Cumbria, LA14 4JS (GB)
• **Posnett, Alan Jeffrey**
Ulverston, Cumbria, LA12 9NP (GB)
• **Whitehouse, Anthony**
Barrow In Furness, Cumbria, LA13 9LQ (GB)

(74) Representative: **Hoste, Colin Francis**
Marconi Intellectual Property
Waterhouse Lane
Chelmsford Essex CM1 2QX (GB)

(54) Flexible coupling

(57) A flexible coupling (12, 16) for transmitting torque from a drive shaft (10) to a driven shaft (18) is described. The coupling (12, 16) comprises a rotatable drive member (20) securable to the drive shaft (10); a rotatable driven member (22) securable to the driven shaft (18); a plurality of radial vanes (24) are provided on the drive member (20) which interdigitate with a plurality of radial vanes (26) on the driven member (22) and

resiliently deformable elements (30, 32) are interposed between the interdigitating vanes (24, 26) to transmit torque there between. The resiliently deformable elements (30, 32) are detachably secured to only either the vanes (24) on the drive member or the vanes (26) on the driven member and are removable in a radial direction without having to remove the drive or driven vanes from the coupling.

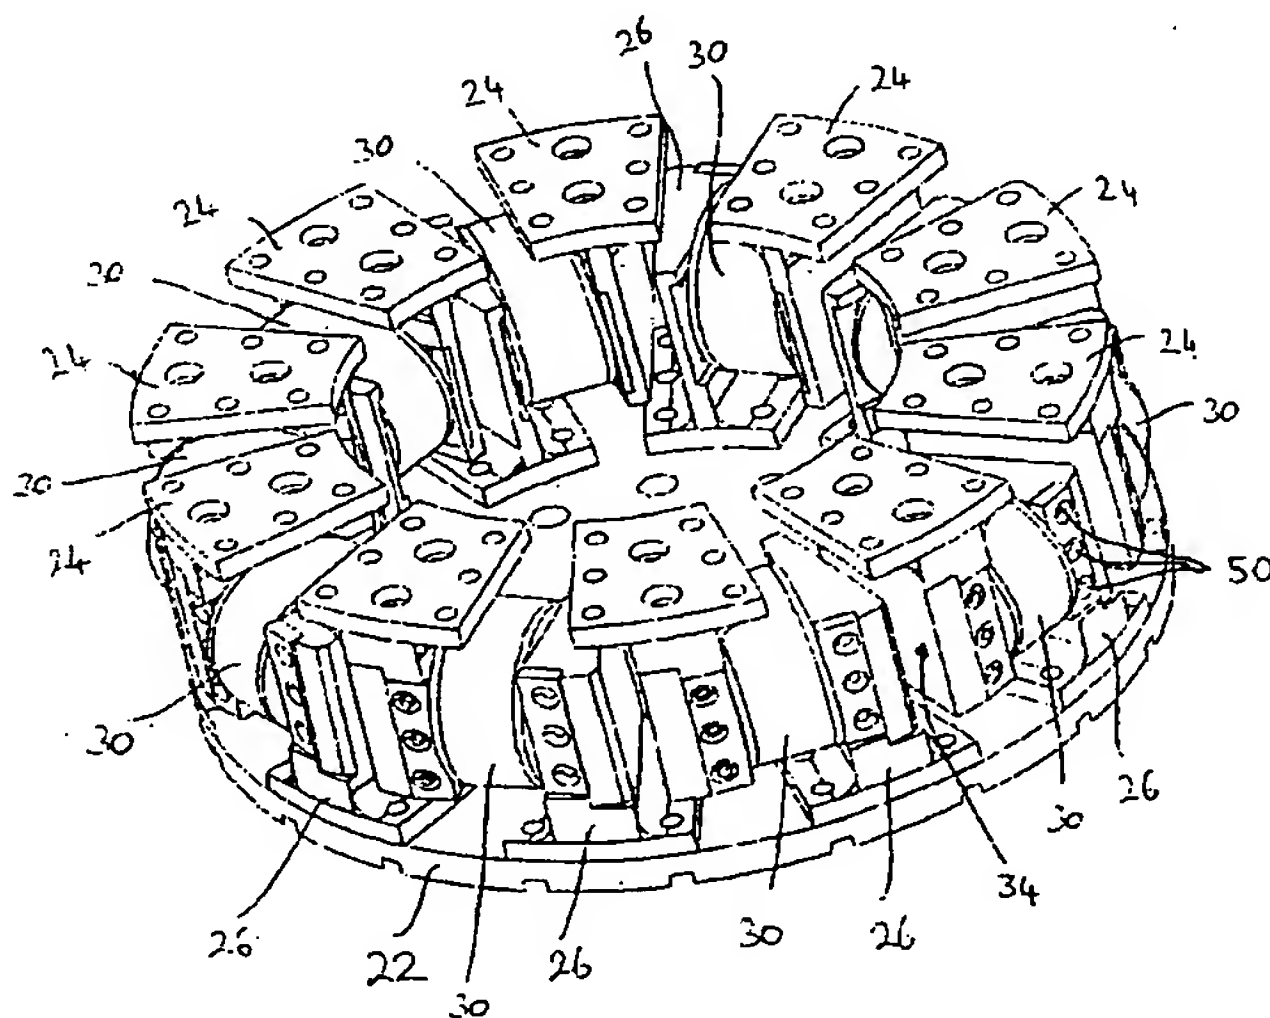


Figure 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 1184

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X A	GB 2 226 383 A (HURTH VERWALTUNGS GMBH) 27 June 1990 (1990-06-27) * the whole document *	1, 16 5-7, 12, 14, 15	F16D3/74 F16D3/68 F16D3/78
X A	US 4 664 037 A (PIEPENBREIER ERNST) 12 May 1987 (1987-05-12) * the whole document *	1, 16 4, 6, 7, 12, 14, 15	
A	US 4 743 218 A (AUBREY JOSEPH H ET AL) 10 May 1988 (1988-05-10) * the whole document *	1, 3, 16	
A	US 4 409 904 A (EICHINGER JOHANN ET AL) 18 October 1983 (1983-10-18) * the whole document *	1, 16	
A	EP 0 397 524 A (UTDC INC) 14 November 1990 (1990-11-14)		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6) F16D
Place of search THE HAGUE		Date of completion of the search 17 July 2000	Examiner BEGUIN, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 1184

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-07-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2226383 A	27-06-1990	DE 3843496 C	26-04-1990
		IT 1237231 B	27-05-1993
US 4664037 A	12-05-1987	DE 3403910 A	08-08-1985
		AT 29561 T	15-09-1987
		BR 8406736 A	22-10-1985
		DE 3466039 D	15-10-1987
		EP 0152568 A	28-08-1985
		ES 539897 D	01-04-1986
		ES 8605623 A	01-09-1986
		HU 41509 A,B	28-04-1987
US 4743218 A	10-05-1988	DE 3667528 D	18-01-1990
		EP 0218377 A	15-04-1987
		GB 2181213 A,B	15-04-1987
US 4409904 A	18-10-1983	DE 3026756 A	27-05-1982
		AT 13030 T	15-05-1985
		AU 6956681 A	21-01-1982
		CA 1170911 A	17-07-1984
		DE 3170236 D	05-06-1985
		EP 0043887 A	20-01-1982
EP 0397524 A	14-11-1990	US 4943261 A	24-07-1990
		AU 5504290 A	15-11-1990
		CA 2016350 A	12-11-1990
		JP 3209023 A	12-09-1991

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82